

C32 ACERT™

MARINE PROPULSION ENGINE

660 bhp 492 kW WOSR 1600-1800 rpm
750 bhp 559 kW WOSR 1600-1800 rpm



Image shown
may not reflect
actual engine



STANDARD ENGINE EQUIPMENT


- Separate circuit aftercooler (SCAC)
- Heavy-duty inlet air cleaner
- Heat exchanger or keel cooling
- SCAC and JW shunt tanks with sight glass
- Watercooled exhaust manifold and turbocharger
- Round flanged exhaust outlet
- Deep sump oil pan
- Oil filler, filter, and dipstick, RH or LH service
- MEUI fuel system
- Duplex fuel filters, RH or LH service
- Engine-mounted fuel cooler
- Fuel transfer and priming pumps
- Hybrid fuel lines
- Electronic fuel/air ratio control
- Electronic diagnostics and fault logging
- Adjustable front support mounting system
- Customer wiring and service tool connector

SPECIFICATIONS

Vee-12, 4-Stroke-Cycle-Diesel

- IMO II compliant
- 32.1 L (1959 cu in) displacement
- 1600-1800 rpm rated engine speed
- 145 mm (5.7 in) bore x 162 mm (6.38 in) stroke
- Turbocharged and aftercooled aspiration
- Electronically governed
- Heat exchanger or keel cooled
- Refill capacity
 - Cooling system: 154 L (40.8 gal) engine and expansion tank
 - Lube oil system: 146 L (38.5 gal)
- 1000-hour oil change interval
- Caterpillar Diesel Engine Oil 10W30 or 15W40
- SAE No. 0 flywheel and flywheel housing, 136 flywheel teeth
- Counterclockwise rotation from flywheel end

DIMENSIONS

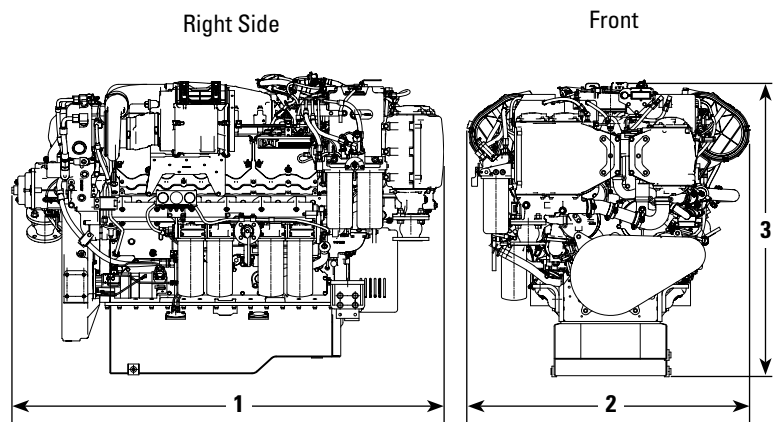

ENGINE DIMENSIONS & WEIGHT

(1) Length (overall)	2284 mm	89.9 in
(2) Width	1528 mm	60.2 in
(3) Height	1584 mm	62.4 in
Weight, Net Dry (keel)	3155 kg	6956 lb
Weight, Net Dry (heat exchanger)	3245 kg	7155 lb

Note: Do not use these dimensions for installation design. See general dimension drawings for detail.


MARINE ENGINE PERFORMANCE

Max Power

A Rating – DM9612-04					A Rating – DM9611-03				
rpm	bhp	g/hr	bkW	g/bkW-hr	rpm	bhp	g/hr	bkW	g/bkW-hr
1800	660	32.3	492	208.4	1800	750	36.2	559	205.8
1600	660	32.0	492	206.5	1600	750	36.5	559	207.0
1400	637	31.3	475	209.1	1400	724	35.3	540	207.4
1100	429	21.4	320	212.0	1100	483	23.9	360	210.7
600	188	9.1	140	206.6	600	188	9.1	140	205.9

Prop Demand

A Rating – DM9612-04					A Rating – DM9611-03				
rpm	bhp	g/hr	bkW	g/bkW-hr	rpm	bhp	g/hr	bkW	g/bkW-hr
1800	660	32.3	492	208.4	1800	750	36.2	559	205.8
1600	463	23.1	346	211.9	1600	527	26.0	393	210.0
1400	310	15.7	232	215.8	1400	353	17.5	263	211.3
1100	151	8.0	112	227.2	1100	171	8.9	128	222.3
600	24	1.8	18.2	316.6	600	28	1.9	21	297.3

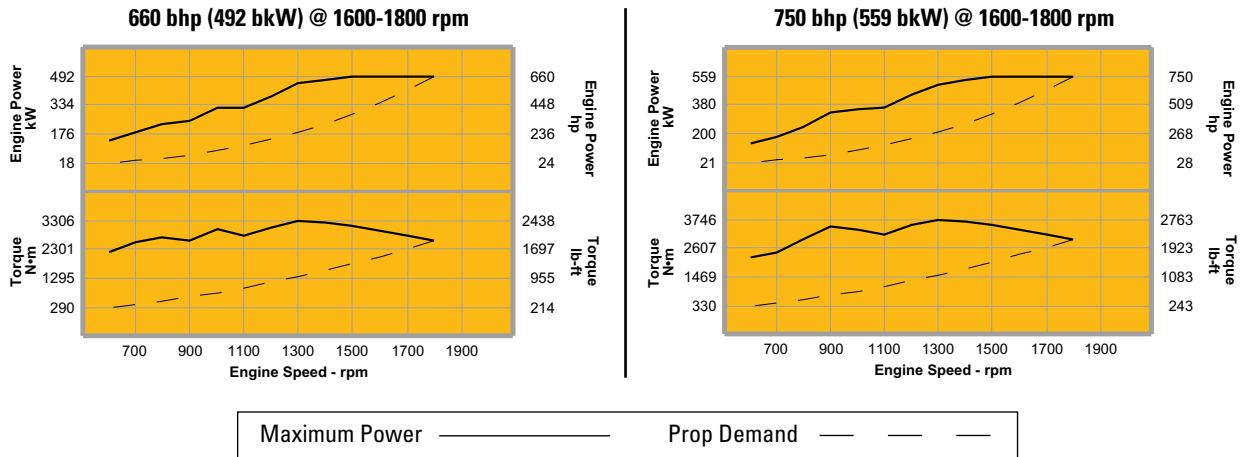

OPTIONAL ATTACHMENTS

- Air inlet adapter
- Battery charger 10 amp
- Charging alternator 24V 105 amp
- Exhaust elbow, dry
- Exhaust flange, flexible fitting, muffler
- Water separator
- Fumes disposal (closed system)
- Duplex oil filters, RH or LH
- Manual sump pump
- Transmission oil cooler
- Starting motors – electric or air
- Dual starting motors (electric and air)
- Jacket water heaters
- Battery sets – 24V 950-1300 CCA
- MECP I control panel
- MECP III control panel with Cat alarm and protection system
- Fuel and oil spray shielding
- OEM wiring harness – 30, 50, 80 foot lengths
- Engine-to-engine wiring harness – 15, 30 foot lengths
- Heavy-duty front support
- Isolator mounts
- Power take-offs

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.