

M314F

Wheeled Excavator

2017



Engine

Engine Model	Cat® C4.4 ACERT™
Emissions	EU Stage IV
Net Power (maximum)	
ISO 9249 at 2,000 rpm	105 kW (141 hp)
ISO 9249 at 2,000 rpm (metric)	143 hp (PS)
ISO 14396 at 2,000 rpm (gross)	110 kW (148 hp)
	150 hp (PS)

Weights

Operating Weight with Attachment	14 360 kg-17 610 kg
----------------------------------	---------------------

Bucket Specifications

Bucket Capacities	0.2 m ³ -1 m ³
-------------------	--------------------------------------

Working Ranges

Maximum Reach at Ground Level	9080 mm
Maximum Digging Depth	5790 mm

Drive

Maximum Travel Speed	37 km/h
----------------------	---------

M314F Features

Made to keep your costs down.

Not only does the machine give you all the versatility you need, but it does so while providing a great deal of precision and speed with an optimized fuel consumption – and zero impact on your efficiency.

Made to make operation easy and pleasant.

Have a seat, you will be impressed by the quietness and comfort of the cab. Feel relaxed, we help you make sure you're safe.

Enjoy integrated technologies; they act transparently.

When you add the ground level grouped service points that make your maintenance quick and easy, and multiple Cat attachments that help you do all kinds of jobs, you simply won't find a better machine.

Contents

Sustainability	4
Engine	5
Built-in Fuel Savers That Add Up	5
Premium Comfort	6
Simplicity and Functionality	7
The Next Generation	8
Smart Technologies	9
Dig and Go Auto Axle Lock.....	9
Hydraulics	10
Undercarriage	11
Booms and Sticks	12
SmartBoom™	13
Ride Control.....	13
Attachments.....	14
Serviceability	16
Integrated Technologies.....	17
Safety	18
Unmatched Visibility.....	20
Complete Customer Care.....	20
Specifications.....	21
Standard Equipment.....	33
Optional Equipment.....	35





The new F Series generation is here to help you take on the wide variety of challenges you face every day, more easily and with more pleasure.

F Series Wheeled Excavators – Easier Than Ever.



Sustainability

Generations Ahead in Every Way

Fuel Efficiency and Reduced Exhaust Emissions

The engine meets Stage IV emission standards, is powerful and efficient, with an optimized fuel consumption and no impact on your productivity. This means less resource consumption and fewer CO₂ emissions.

Transparent Technologies and Longer Service Intervals

- The Eco Mode, Auto Engine Speed Control and Engine Idle Shutdown help further reduce your overall fuel consumption.
- Product Link™ allows remote monitoring of the machine and helps improve overall efficiency.
- Your Cat dealer can help extend service intervals, meaning fewer fluids and disposals, all adding up to lower costs.

Biodiesel and Biodegradable Hydraulic Oil

- The M314F has the flexibility of running on either ultra-low-sulfur diesel (ULSD) fuel with 10 ppm of sulfur or less or up to B20 biodiesel fuel blended with ULSD.
- Cat BIO HYDO™ Advanced HEES™ reduces the impact on the environment.

Cat Certified Used

This program is a key element in the range of solutions offered by Caterpillar and Cat dealers to help customers achieve growth at the lowest cost while eliminating waste. Used equipment is inspected, guaranteed and ready for work and customers will benefit from a Caterpillar warranty.

Engine

Power, Reliability, and Fuel Economy

The Power and Performance You Need

Constant Power Strategy

Provides a quick response to changing loads, while delivering the same amount of power regardless of operating conditions.

A Transparent Emission Solution That Works

The Cat C4.4 ACERT engine meets today's Stage IV emission standards, and it does so without interrupting your job process. It is designed to be:

- **Transparent:** no operator intervention
- **Efficient:** no work interruption, even in case of extended idling time
- **Simple:** minimum maintenance. Longitudinal engine installation, which further simplifies maintenance.

Biodiesel Not a Problem

The engine can run on up to B20 biodiesel fuel that meets ASTM 6751 standards – all to give you more potential fuel-saving flexibility.


Proven Technology

To assure that our technology will meet your expectations for reliable trouble-free service, we subjected these engines and technologies to extensive operating hours of test and validation.



Built-in Fuel Savers That Add Up

- **Automatic Engine Speed Control:** lowers engine speed when it is not needed.
- **Engine Idle Shutdown:** turns the engine off when it's been idling for more than a pre-set amount of time.
- **On-Demand Cooling System:** variable speed and on-demand fan.
- **Enhanced Eco Mode:** reduces engine speed while delivering the same power.
- **Automatic Shift to Travel Mode** when you start driving.
- **NEW! Optimized Travel Mode:** travel mode rpm levels are set automatically on-demand only to further reduce fuel consumption.

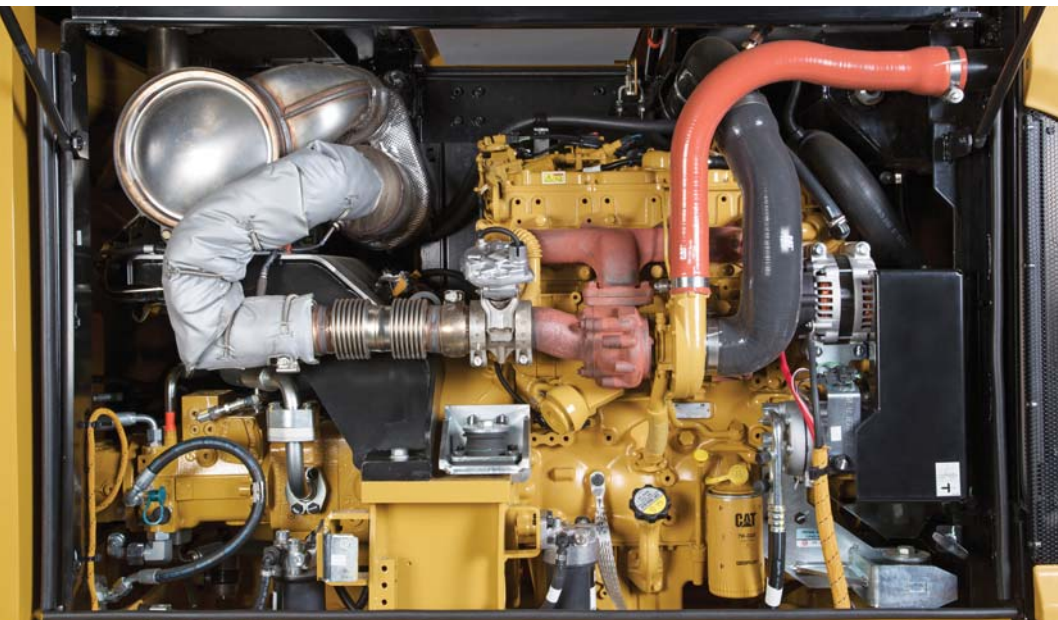

Premium Comfort

Keeps Operators Productive All Shift Long



Legacy from the Renowned Cat Wheeled Excavators

Designed for the operator, our cabs are unique.

Ergonomic Layout

- Frequently used switches are centralized, kept to the minimum and ideally located close to the joysticks.
- Storage compartments are useful... when well designed. Several areas provide sufficient room to store a hard hat, a drink, phone, or keys.

Comfortable Seat Options

Our seats provide all the comfort needed for a long day of work, including FULL adjustment. All seats are heated and air suspended. Automatic weight adjustment and ventilated seats are available.

Safety Is Not Optional

ROPS cab, compatible with FOPS, seat belt alarm, safety bar, sideview camera ... among others.

Details That Make the Difference

Have a look at the cab; you will see it is through details that we improve pleasure of operating.

Smart Controls to Reduce Fatigue

- Features like ride control, SmartBoom or Joystick Steering will be precious to increase your productivity.
- New technologies that work transparently like the swing and auto travel lock or the automatic brake and axle lock, reduce the number of tasks you need to do.

Plug, Charge and Play Your Devices

- The 12V 10A power supply socket is conveniently located for charging your laptop, or a tablet.
- A CD/MP3 Radio with speakers and USB port is available.





Simplicity and Functionality

For Ease of Operation

A Cab Just for You – Fully Adjustable

- Seat armrests, in height and angle
- Steering column adjustment, not only tilting fore/aft but also in height
- Hydraulic sensitivity of the machine to make it more or less aggressive
- NEW! Joystick and left pedal controls assignments: can be set up as desired and per tool
- NEW! Optional advanced joystick offering more controls (two sliders, five buttons each)
- Automatic air conditioning
- NEW! Optional heated mirrors are now also electrically adjustable from the cab

Low Sound Levels, Less Fatigue

Increased cab pressure, preventing from dust entry, combined with the cab design contributes to reducing sound.

Outstanding Visibility: See the Difference!

- All glass areas have been drastically increased
- Standard LED working lights and halogen front roading lights
- LED dome light
- Standard rearview AND sideview wide angle cameras
- Wide angle mirrors for better visibility even down to the ground
- Parallel intermittent (four speeds) wipers covering the whole windshield

NEW! Standard LED Lights for BOTH Cameras to See What's Going on Around, Day or Night

The rear camera is integrated into the counterweight for enhanced protection.

NEW! Split-Screen View of BOTH Cameras on the Same Monitor

The views from both cameras are displayed side by side on the additional wide color monitor for better visibility at first glance.

Large Color Machine Monitor

Easy to read and in local language, the high resolution LCD monitor will keep you aware of any important information. "Quick Access" buttons allow a quick selection of favorite functions. The tool select function lets you preset up to ten different hydraulic attachments (including the new Cat Tilt-Rotator) for quick tool changes.

The Next Generation

Easier Than Ever



Make the Move to the Next Generation

Refinements. From the whole design to the smallest details. Convenient features, new advanced and transparent technologies, not only to reduce emissions but to further improve your daily experience when working with our products.

Cruise Control – Focus on the Road, Not on Your Foot

No need to press the pedal all the time.

- Choose the very speed you wish
- Press the quick access button on the monitor
- Enjoy the ride

It's as Easy as That.

NEW! Trailer-Ready Package – Hitch-Up Your Trailer and Go

How to be more autonomous than ever while increasing your flexibility?

Our trailer-ready package includes all the necessary electrical and hydraulic systems, even for trailers equipped with a tailgate and dumping devices.

Moving your tools, and fuel along with you to each job site or material directly on site has never been easier!



Smart Technologies

Swing and Auto Travel Lock: Press, Go and Relax

No need for the operator to bend to engage the swing lock pin.

- Just press a button,
- Align the upper to the lower frame,
- Enjoy the ride: a green indicator confirms the swing and the implements have been automatically locked.
- NEW! The swing lock can be applied independently from the implements lock at low speed (below 5 km/h)

It's as Easy as That.

Integrated Pin Code – Switch Off and Relax

No need to buy an optional security system to protect your equipment against theft.

- The pin code is integrated into the monitor (standard)
- Entering the right code allows the engine to start

The Machine Security System (MSS – optional) adds even more protection when needed.

It's as Easy as That.




Dig and Go Auto Axle Lock

Presses the pedal for you, reducing the number of actions you need to do

The machine automatically detects when the service brake and axle need to be locked (like when digging), or unlocked (roading), hence removing the need for the operator to systematically press the pedal.

Brake and axle are released automatically by pressing the travel pedal again.

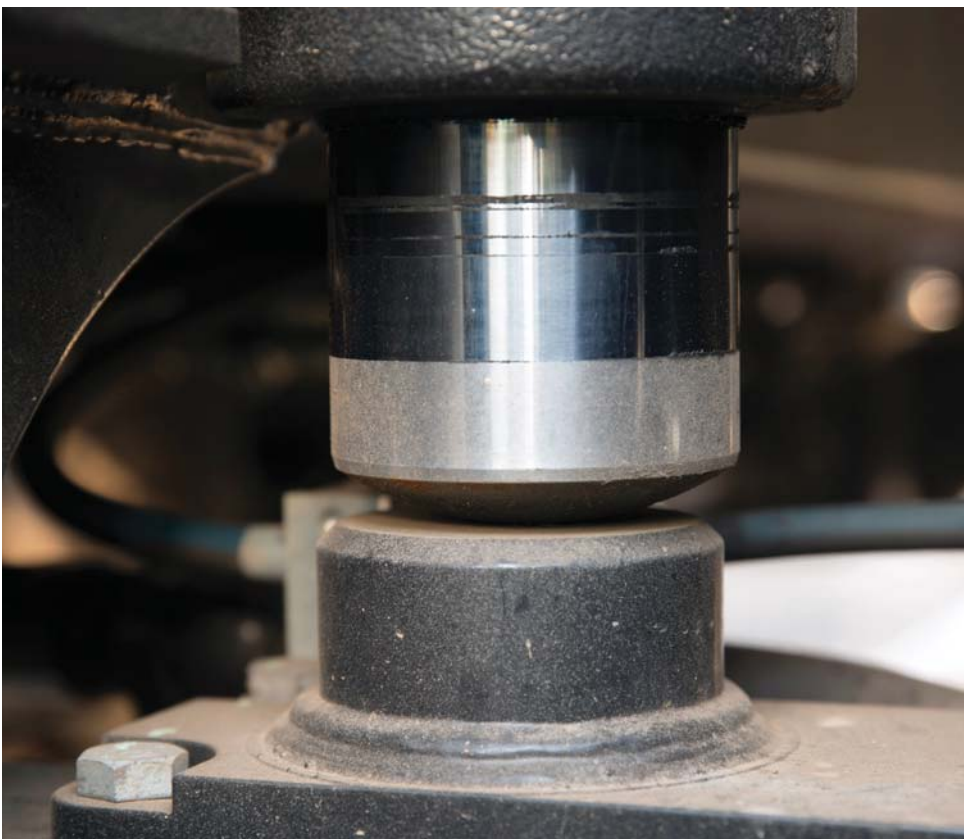

Hydraulics

Fast, Precise, Flexible

When it comes to moving material quickly, you need efficient hydraulics – the type the F Series can deliver.

Efficient Design, Smart and Fast


- **Simple Design:** The new hydraulic valve compartment and routings offer a simple and clean design to help ensure durability.
- **Smart Main Hydraulics:** The system allows reducing the load on the engine when not needed, which translates into lower fuel consumption.
- **Dedicated Swing Pump:** A closed hydraulic circuit is dedicated to the swing only. Having two separate pumps, one for the swing and the second for the other functions allows faster and smoother combined movements.

Control Like No Other

- **Load Sensing Hydraulics** – Controllability is one of the main attributes of Cat excavators, and one of the key contributors to this is the load sensing hydraulic system that's designed to provide fast cycle times, great lift capacity and high bucket and stick forces to maximize your efficiency in any job.
- **Adjustable Hydraulic Sensitivity** – Allows you to adjust the aggressiveness of the machine according to the application.
- **Stick Regeneration Circuit** – Increases efficiency and helps enhance controllability for higher productivity.

Proportional Auxiliary Hydraulics, Tremendous Versatility

Medium, high pressure and hydraulic quick coupler lines and circuits: they all come standard.

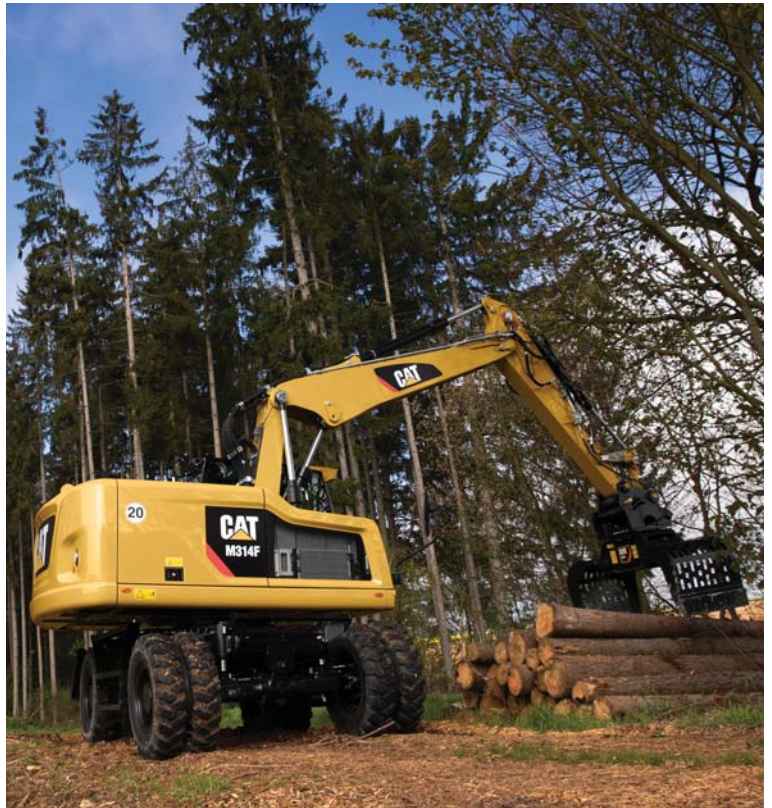

Undercarriage

Strength and Versatility at 37 km/h



Heavy Duty Axles

Long life with effective heavy duty axles. The transmission is mounted directly on the rear axle for protection and optimum ground clearance. The front axle offers wide oscillating and steering angles. The drive shaft offers longer service intervals (1,000 hours).

Advanced Disc Brake System

Minimizes the rocking effect when working free on wheels. The disc brake system acts directly on the hub instead of the drive shaft to avoid planetary gear backlash.



Fenders (optional)

Fenders provide excellent coverage of all tires, protecting the machine and surroundings from mud and stones being thrown up.



Joystick Steering

Keep both hands on the joysticks even when simultaneously moving the implements and repositioning the machine, by the use of the slider switch on the right joystick.

Blade Design

- Optimized design to provide rigidity, stability and ease of maintenance.
- A profile that allows material to roll better and minimizes material packing.

Booms and Sticks

Options To Take on Your Far-reaching or Up-close Tasks

Rugged Performance

Booms and sticks are welded, box section structures with thick, multi-plate fabrications in high stress areas for the tough work you do.

Flexibility

The choice of various booms and sticks provides the right balance of reach and digging forces for all applications.

Sticks

- **Short stick – 2000 mm** for maximum breakout force and lifting capability
- **Medium stick – 2300 mm** for greater crowd force and lift capacity
- **Long stick – 2600 mm** for greater depth and reach
- **Industrial stick – 2900 mm:** for use with grapples in material handling and industrial applications.

Booms

- **Variable Adjustable (VA)** – improved right side visibility and roading balance. When working in tight quarters or lifting heavy loads, the VA boom offers the best flexibility.
- **One-Piece Boom** – Fits best for all standard applications such as truck loading and digging. A unique straight section in the curve of the side plate reduces stress flow and helps increase boom life.
- **Offset Boom** – The large offset dimensions allow you to dig along walls, over obstacles, to grade while driving, and to dig under laid tubes without damaging them. The combination with a tiltable ditch cleaning bucket lets you operate a highly versatile system.



SmartBoom

Reduces Stress and Vibration

Rock Scraping

Scraping rock and finishing work is easy and fast. SmartBoom simplifies the task and allows more focus on stick and bucket, while the boom freely goes up and down without using pump flow.

Hammer Work

The front parts automatically follow the hammer while penetrating the rock. Blank shots or excessive force on the hammer are avoided resulting in longer life for the hammer and the machine. Similar advantages with vibratory plate compactors.

Truck Loading

Loading trucks from a bench is more productive and fuel efficient as the return cycle is reduced while the boom down function does not require pump flow.



Ride Control

Fast Travel Speed with More Comfort

The ride control system lets you travel faster over rough terrain with improved ride quality for the operator. Accumulators are acting as shock absorbers to dampen the front part motion. It can be activated through a button located on the soft switch panel in the cab.






NEW! Cat Tilt-Rotator and Tilt-Rotator-Ready Option – If you need extreme versatility, you need a Cat Tilt-Rotator

Tilt-Rotators eliminate the need to constantly reposition the machine, by providing a 40° tilt and 360° rotary connection between its integrated quick coupler and any Cat attachment.

The wheeled excavator Tilt-Rotator-Ready Package includes all that you need, with lines, circuits, software and advanced joysticks. This is a perfectly integrated interface between the machine and this tool.

NEW! Cat Tilt-Rotator parameters can be set directly from the machine monitor.

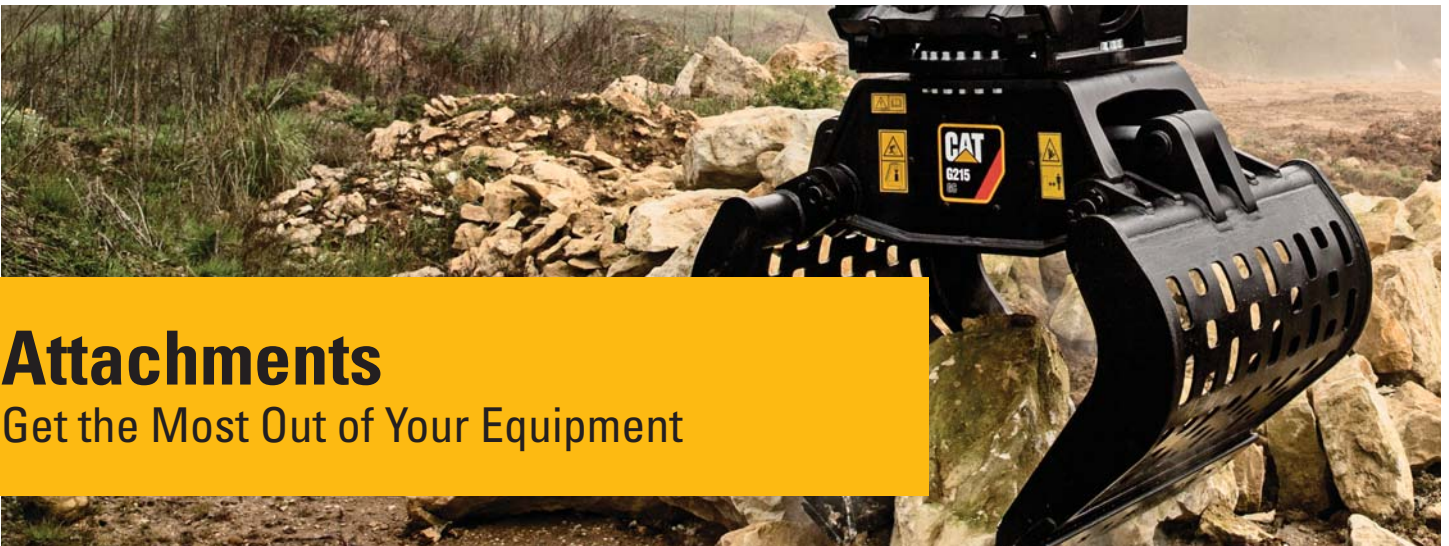

Attachments

Get the Most Out of Your Equipment



Save Time with Every Attachment Change

Perform hydraulic attachment changes in seconds ... The new Auto-Connect hydraulic coupler automates work tool exchange fully, so operators can change attachments quickly, from the safety and comfort of their cabs. The unique design of the Auto-Connect prevents ruptured hoses, avoiding unplanned downtime. It makes your operators more efficient and productive.



Power Match

Match your Cat hydraulic attachments to your Cat machine, and get the most out of the standard, built-in software. Attachment changes have never been easier!

Get the Most from Your Machine

If you have multiple tasks to get done, the M314F can help. And you can easily expand all the possibilities it offers by utilizing any of the variety of Cat attachments.

Change Jobs Quickly

A quick coupler brings the ability to quickly change attachments and increase your flexibility. The quick coupler circuit and lines are compatible with both Cat dedicated and Pin Grabber Couplers and do not require any change or addition to the machine.

Dig, Load and Landscape

A wide range of buckets offers solutions for digging, excavating, trenching, loading and finishing. Ditch Cleaning buckets are suitable for grading and finishing in landscaping applications or for loading loose material that is stockpiled, where teeth would damage the surface.

Sort and Handle Material

With increasing environmental regulations, you need efficient ways to deal with waste. Save on transportation, manpower and dumping costs with Cat grapples by sorting debris at source and trucking it separately. When you need good penetration, you can count on Cat digging grabs.

Build, Compact and Maintain Roads

Whether you do finish grading with leveling buckets, ditch cleaning, sewer and water, or compaction, the machine in combination with the appropriate attachment will do the job quickly.

Break and Scrap

When a structure needs to be demolished, it has to be done quickly. Cat E Series hammers deliver very high blow rates, and shears provide effective scrap processing. They also have the ability to rotate 360°.



Serviceability

When Uptime Counts

Convenient Access Built In

You can reach routine maintenance items like fuel and engine oil filters and fluid taps at ground level while fuel and DEF tanks with engine air filter are accessible from the safety of the slip-resistant new service platform. Compartments feature wide composite service doors, designed to be more resistant to shocks, which all include gas struts to facilitate the opening. Components are now gathered in specific dedicated compartments, like the special electrical and cooling compartments.

A Smart Design for Any Temperature

The side-by-side coolers and axial fan design allows greater cooling performance. The system is completely separated from the engine compartment to reduce noise and heat and all radiators are gathered in the same compartment while featuring easy-to-clean cores with a tilting device that requires no tool to unlock.

A Fresh Idea

Ventilation inside the cab allows outside air to enter through a fresh air filter. The filter is located on the side of the cab to make it easy to reach, and it is protected by a lockable door that can be opened with the ignition key.

Lube and Fuel Standard Features

An electric lubrication system is a time-saving standard feature for greasing the whole upper carriage. Greasing points for the undercarriage are kept to a minimum and grouped. The new drive shaft extends greasing intervals from 500 hours to 1,000 hours and allows simultaneous greasing with the lower axle bearing. An electric refueling pump is also standard. The hose is stored in a dedicated tray, for more cleanliness. Add in the new electric lift pump removing the need to prime the system manually, the standard fuel and water separator and you get a machine that does the fastidious maintenance works for you.

Keep It Simple.



Integrated Technologies

It Pays to Know



Cat Connect makes smart use of technology and services to improve your job site efficiency. Using the data from technology-equipped machines, you'll get more information and insight into your equipment and operations than ever before.

Cat Connect technologies offer improvements in these key areas:



EQUIPMENT MANAGEMENT

Equipment Management – increase uptime and reduce operating costs.



PRODUCTIVITY

Productivity – monitor production and manage job site efficiency.



SAFETY

Safety – enhance job site awareness to keep your people and equipment safe.


Featured Cat Connect technologies include the following:

Link

Link technologies provide wireless capability to machines to enable two-way transfer of information collected by on-board sensors, control modules, and other Cat Connect technologies.

Manage Your Machine Remotely

Cat Product Link is a system that is deeply integrated into the machine monitoring system to take the guesswork out of managing your equipment. The system tracks location, hours, fuel usage, productivity, idle time, and diagnostic codes and shares it with you through VisionLink® to help you maximize efficiency, improve productivity, and lower operating costs.

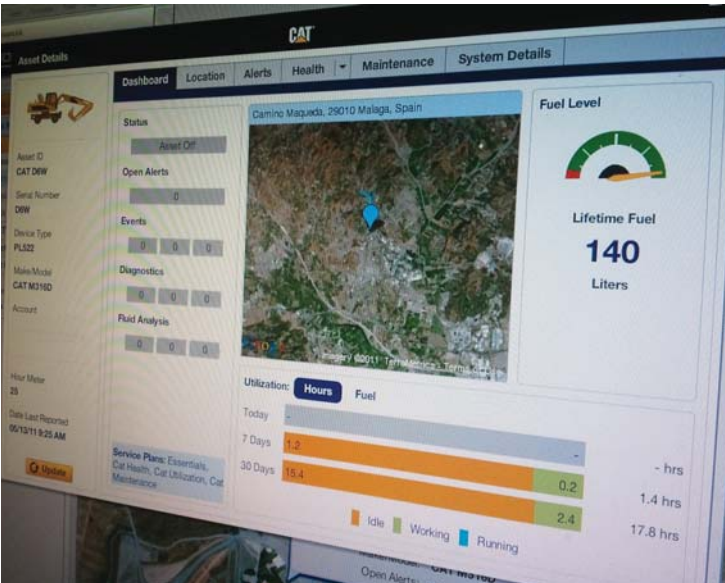

CAT® CONNECT



EQUIPMENT MANAGEMENT



PRODUCTIVITY



SAFETY



SUSTAINABILITY

Safety

Your Safety Is NOT Optional

Cab Ingress


We bring a solution to allow you to safely climb into the cab:

- Three longer access steps, aligned with the cab entry
- Anti-skid plates on all walkways and steps reducing slipping hazards
- Convenient door handrail
- Tiltable console to make sure the way in and out is free of obstacle

Safe and Quiet Cab

The cab provides you with a safe environment. It also contributes to your comfort with limited vibrations and low sound levels.



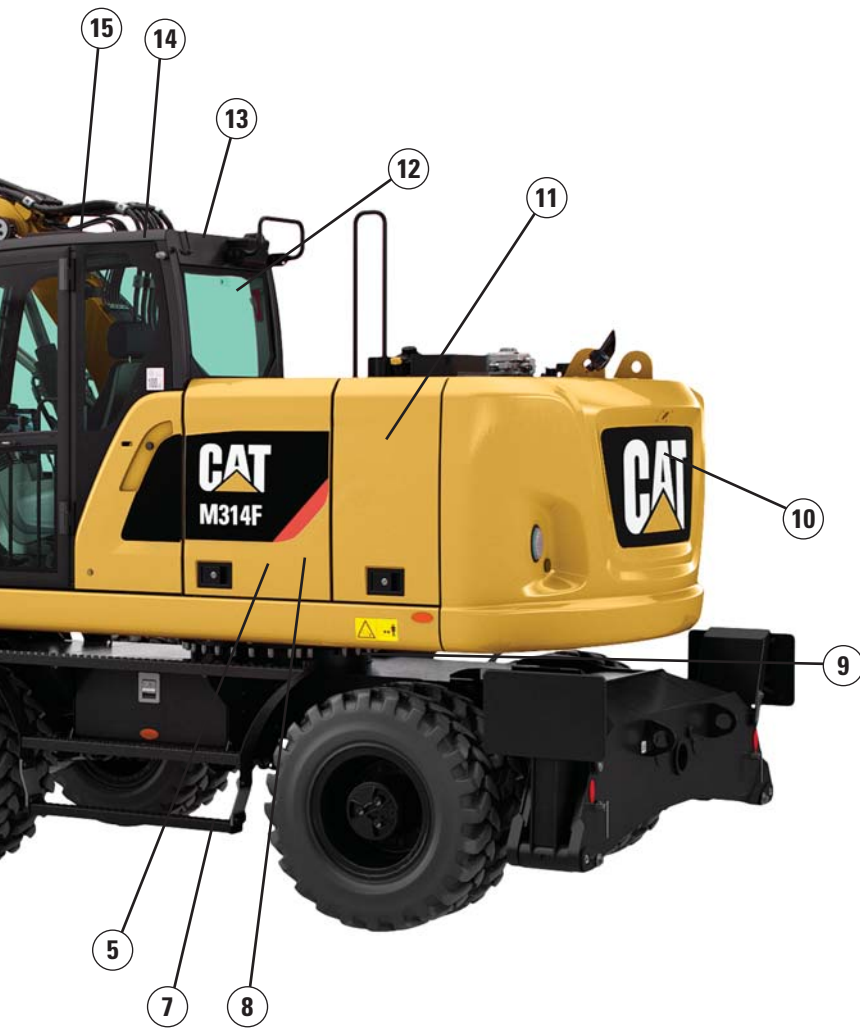

Embedded Features

Smart embedded devices help enforce safe behavior:

- 1) Laminated windshield and skylight window. One-piece 10 mm windshield and skylight, fulfilling EN356 P5A standards.
- 2) Lowering check valves
- 3) Safety seat belt indicator
- 4) Safety lever
- 5) Emergency shut-off switch
- 6) Automatic brake and axle lock
- 7) Punched, anti-slippery walking surfaces
- 8) Battery disconnect switch
- 9) Swing and implement electronic lock
- 10) Adjustable travel alarm
- 11) All doors equipped with gas struts cylinders
- 12) Emergency hammer and exit
- 13) ROPS compliant and front/top guards compatible cab
- 14) Sound proofing
- 15) Beacon available

NEW! Quick coupler control switch, ISO 13031 compliant

Smart Lighting

- LED lights for all working lights for enhanced night-time visibility
- Halogen lights for front roading lights
- LED dome light for better illumination inside the cab
- NEW! Dedicated LED lights for both rear and side cameras




Great Views

- Enlarged glass gives you excellent visibility to the front, top, rear, and sides, even to the right
- Standard rearview camera gives you a clear field of view behind the machine
- Standard sideview camera, to check nothing is hidden to you from the front right hand side to the rear of the machine
- NEW! Monitor split-screen to easily check cameras rearview and sideview on the same display
- Lenses of all the cameras are wide angle and heated
- All mirrors are wide angle and allow view not only around the machine but also to the ground

Unmatched Visibility

Make Sure Nothing Is Hidden to You

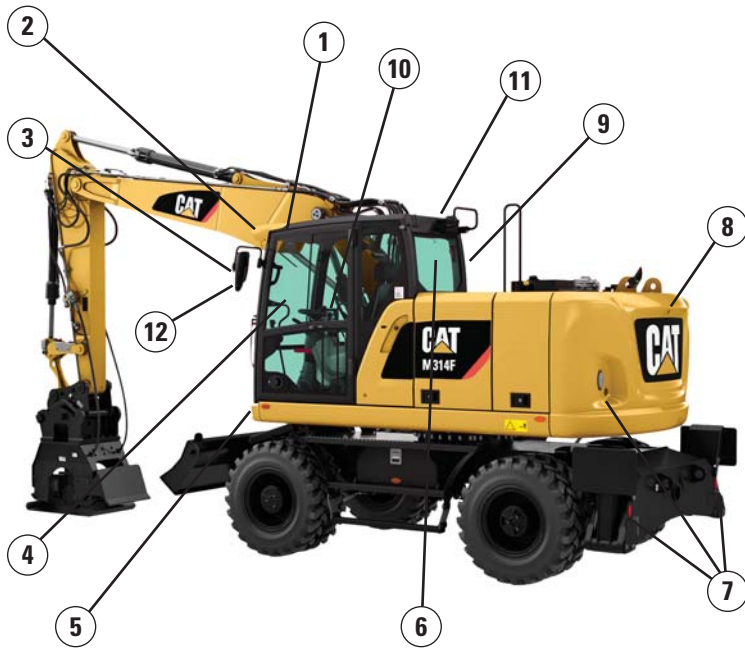

Visibility all around is critical, especially for machines which go on public roads.

- 1) Increased skylight and windshield glass areas
- 2) Improved lighting with standard LED lights for all working lights
- 3) Optional electrically adjustable and heated mirrors
- 4) Great left hand side visibility with all glass door
- 5) Halogen front roading lights
- 6) Wide rear window
- 7) Red reflectors, on counterweight and rear blade/outriggers
- 8) Standard wide rearview camera with LED light
- 9) Standard wide sideview camera with LED light
- 10) Split-screen display of both cameras on the same monitor
- 11) Large right hand side window
- 12) Mirrors, wide angle, with additional lower mirror for ground visibility

Complete Customer Care

Your Cat Dealer Will Support You Like No Other

Support You Can Count On

From helping you to choose the right machine to knowledgeable on-going support, Cat dealers provide the best-in-sales and services.

- **Best long-term investment** with financing options and services
- **Productive operation** with training programs
- **Preventive maintenance** and guaranteed maintenance contracts
- **Uptime**, with best-in-class parts availability
- **Repair, rebuild, or replace?** Your dealer can help evaluate the best option.



M314F Wheeled Excavator Specifications

Engine

Engine Model	Cat C4.4 ACERT ⁽¹⁾
Ratings	2,000 rpm
Engine Gross Power (maximum)	
ISO 14396	110 kW (148 hp)
ISO 14396 (metric)	150 hp (PS)
Net Power (Rated) ⁽²⁾	
ISO 9249/SAE J1349	105 kW (141 hp)
ISO 9249/SAE J1349 (metric)	143 hp (PS)
80/1269/EEC	105 kW (141 hp)
Net Power (maximum)	
ISO 9249/SAE J1349	105 kW (141 hp)
ISO 9249/SAE J1349 (metric)	143 hp (PS)
80/1269/EEC	105 kW (141 hp)
Bore	105 mm
Stroke	127 mm
Displacement	4.4 L
Maximum Torque at 1,400 rpm	560 N·m
Number of Cylinders	4

⁽¹⁾ Meets Stage IV emission standards.

⁽²⁾ Rated speed 2,000 rpm.

- Net power advertised is the power available at the flywheel when engine is equipped with air cleaner, CEM exhaust gas aftertreatment, alternator, and cooling fan running at intermediate speed.
- No deratings required up to 3000 m altitude. Automatic derating occurs after 3000 m.

Transmission

Forward/Reverse	
1st Gear	9 km/h
2nd Gear	37 km/h
Creeper Speed	
1st Gear	3 km/h
2nd Gear	12 km/h
Drawbar Pull	73 kN
Maximum Gradeability (15 000 kg)	52.5%

Service Refill Capacities

Fuel Tank (total capacity)	280 L
Diesel Exhaust Fluid Tank	19 L
Cooling System	38 L
Engine Crankcase	8 L
Rear Axle Housing (differential)	11.2 L
Front Steering Axle (differential)	9 L
Final Drive	2.4 L
Powershift Transmission	2.5 L

Swing Mechanism

Maximum Swing Speed	9.8 rpm
Maximum Swing Torque	36 kN·m

Undercarriage

Ground Clearance	360 mm
Maximum Steering Angle	35°
Oscillation Axle Angle	±8.5°
Minimum Turning Radius	
Outside of Tire	6200 mm
End of One-Piece Boom	8100 mm
End of VA Boom	6700 mm
End of Offset Boom	6700 mm
Maximum Towable Trailer Mass	8000 kg

Weights

Operating Weights*	14 360 kg-16 510 kg
Weights	
VA Boom	
Rear Dozer Only	14 710 kg
Rear Dozer, Front Outriggers	15 670 kg
Front and Rear Outriggers	15 950 kg
One-Piece Boom	
Front Dozer, Rear Outriggers	15 320 kg
Front and Rear Outriggers	15 600 kg
Offset Boom	
Rear Dozer, Front Outriggers	16 230 kg
Front and Rear Outriggers	16 510 kg
Sticks**	
Short, 2000 mm	610 kg
Medium, 2300 mm	630 kg
Long, 2600 mm	675 kg
Industrial-Drop Nose, 2900 mm	390 kg
Counterweights	
Standard	2800 kg
Optional	3300 kg

*Operating weight includes medium stick, 2800 kg counterweight, full fuel tank, operator, quick coupler (210 kg) bucket (490 kg) and dual pneumatic tires. Weight varies depending on configuration.

**Includes cylinder, bucket linkage, pins and standard hydraulic lines.

M314F Wheeled Excavator Specifications

Hydraulic System

Tank Capacity	89 L
System	220 L
Maximum Pressure	
Implement Circuit	
Normal	350 bar
Heavy Lift	375 bar
Travel Circuit	350 bar
Auxiliary Circuit	
High Pressure	350 bar
Medium Pressure	185 bar
Swing Mechanism	350 bar
Maximum Flow	
Implement/Travel Circuit	180 L/min
Auxiliary Circuit	
High Pressure	180 L/min
Medium Pressure	50 L/min
Swing Mechanism	78 L/min

Tires

Standard	10.00-20 (Dual Pneumatic)
Optional	10.00-20 (Dual Solid Rubber) 315/70R22.5 (Dual Pneumatic – No spacer ring between tires) 445/70/R19.5 TL XF (Single Pneumatic)

Dozer Blade

Blade Type	Radial
Width	2540 mm
Blade Roll-Over Height	540 mm
Blade Total Height	580 mm
Maximum Lowering Depth from Ground	120 mm
Maximum Raising Height above Ground	470 mm

Emissions and Safety

Engine Emissions	Stage IV
Diesel Exhaust Fluid	Must meet ISO 22241
Fluids (optional)	
Cat Bio HYDO Advanced	Readily biodegradable EU Flower eco-label certified
Biodiesel up to B20	Meets EN 14214 or ASTM D6751 with EN590 or ASTM D975 Standard Mineral diesel fuels
Vibration Levels	
Maximum Hand/Arm	
ISO 5349:2001	<2.5 m/s ²
Maximum Whole Body	
ISO/TR 25398:2006	<0.5 m/s ²
Seat Transmissibility Factor	
ISO 7096:2000-spectral class EM5	<0.7

Standards

ROPS	ROPS (Rollover Protective Structure) offered by Caterpillar meets ROPS criteria ISO 12117-2:2008
Operator Protective Structure: top/front guards	FOPS (Falling Object Protective Structure) meets FOPS criteria ISO 10262:1998 and SAE J1356:2008
Cab/Sound Levels	Meets appropriate standards as listed below

Sound Performance


Operator Sound	
2000/14/EC	71 dB(A)
Spectator Sound	
2000/14/EC	101 dB(A)

- Operator Sound – The operator sound level is measured according to the procedures specified in 2000/14/EC, for a cab offered by Caterpillar, when properly installed and maintained and tested with the door and windows closed.
- Exterior Sound – The labeled spectator sound power level is measured according to the test procedures and conditions specified in 2000/14/EC.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained for doors/windows open) for extended periods or in noisy environment(s).

M314F Wheeled Excavator Specifications

Dimensions

All dimensions are approximate. Values are with 10.00-20 pneumatic tires.

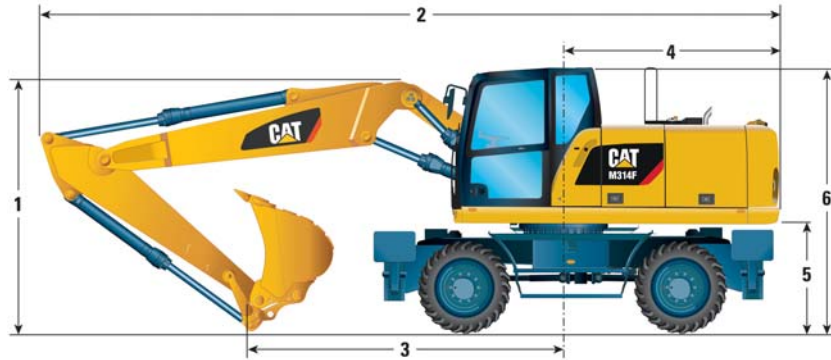

Stick Length	mm	Variable Adjustable Boom				One-Piece Boom				Offset Boom	
		2000	2300	2600	2900	2000	2300	2600	2900	2000	2300
1 Shipping Height with Falling Object Guard and Handrails Lowered (highest point between boom and cab)	mm	3280	3280	3280	3280	3280	3280	3330	3280	3280	3280
2 Shipping Length	mm	8460	8455	8445	8445	8250	8250	8185	8275	8455	8455
3 Support Point	mm	3820	3465	3315	3580	3485	3115	3450	3155	3810	3455
4 Tail Swing Radius	mm		2090				2090			2090	
5 Counterweight Clearance	mm		1230				1230			1230	
6 Cab Height – No Falling Object Guard, Handrails Lowered	mm		3150				3150			3150	
No Falling Object Guard, Handrails not Lowered	mm		3210				3210			3210	
With Falling Object Guard	mm		3280				3280			3280	
7 Overall Machine Width											
Width with Outriggers on Ground	mm		3645				3645			3645	
Width with Outriggers Up	mm		2545				2545			2545	
Width with Blade	mm		2540				2540			2540	
8 Maximum Outriggers Depth	mm		110				110			110	



*Maximum tire clearance with outrigger fully down



Roading position with 2300 mm stick




Undercarriage with dozer only



Undercarriage with 2 sets of outriggers






Undercarriage with 1 set of outriggers and dozer



M314F Wheeled Excavator Specifications

Working Ranges

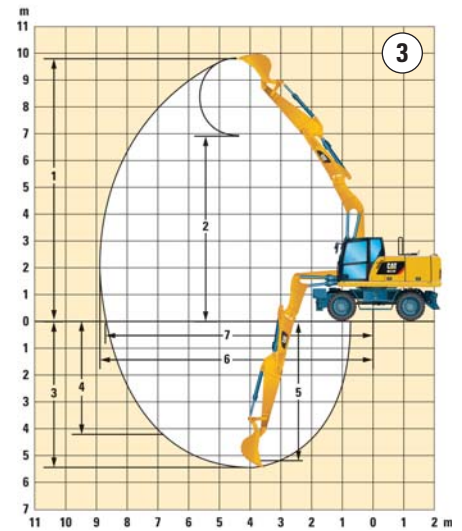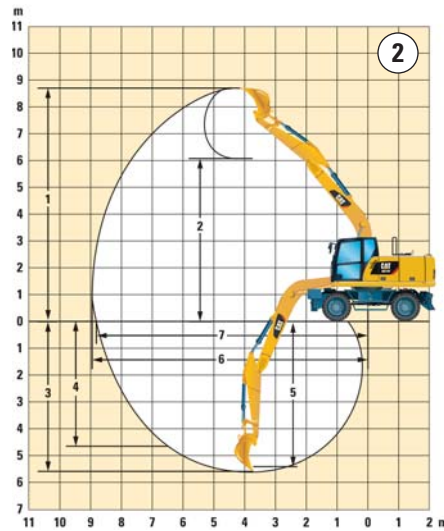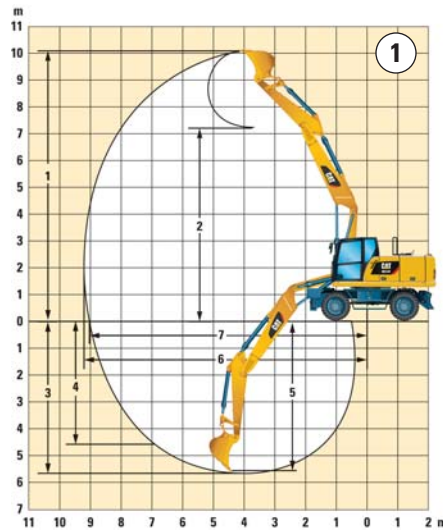

		①				②				③	
		Variable Adjustable Boom				One-Piece Boom				Offset Boom	
Stick Length	mm	2000	2300	2600	2900	2000	2300	2600	2900	2000	2300
1 Digging Height	mm	9720	9870	10 060	8500	8690	8700	8800	7140	9710	9850
2 Dump Height	mm	6850	7000	7200	—	5860	5920	6030	—	6840	6980
3 Digging Depth	mm	5200	5490	5790	4670	5030	5330	5630	4500	5200	5490
4 Vertical Wall Digging Depth	mm	4140	4310	4560	—	4270	4430	4640	—	4120	4280
5 Depth 2.5 m in Straight Clean-Up	mm	5090	5380	5680	—	4790	5120	5430	—	5080	5380
6 Reach	mm	8710	8960	9230	7910	8470	8700	8970	7610	8710	8950
7 Reach at Ground Level	mm	8530	8780	9060	7705	8280	8520	8790	7400	8520	8780
Bucket Forces (ISO 6015)	kN	103	103	103	—	103	103	103	—	103	103
Stick Forces (ISO 6015)	kN	76	69	64	—	76	69	64	—	76	69

Industrial stick has no bucket linkage. Working range dimensions refer to stick nose pin, with pneumatic tires.

Range values are calculated with GD Bucket, 900 mm, 0.53 m³ with tips J250 and CW-20-H.4.N quick coupler with a tip radius of 1437 mm.

Breakout force values are calculated with heavy lift on (no quick coupler) and a cutting edge radius of 1111 mm.

M314F Wheeled Excavator Specifications

Bucket Specifications and Compatibility

Contact your Cat dealer for special bucket requirements.

Stick Length				Variable Adjustable Boom									One-Piece Boom						Offset Boom											
				2000 mm			2300 mm			2600 mm			2000 mm			2300 mm			2600 mm			2000 mm		2300 mm						
Pin-on Buckets	Width	Weight	Capacity (ISO)	Free on wheels	Front dozer lowered	Front dozer and rear outriggers	Fully stabilized	Free on wheels	Front dozer lowered	Front dozer and rear outriggers	Fully stabilized	Free on wheels	Front dozer lowered	Front dozer and rear outriggers	Fully stabilized	Free on wheels	Front dozer lowered	Front dozer and rear outriggers	Fully stabilized	Free on wheels	Front dozer lowered	Front dozer and rear outriggers	Fully stabilized	Free on wheels	Front dozer lowered	Front dozer and rear outriggers	Fully stabilized			
					With 2.8 mt Counterweight																									
General Duty (GD)	450	302	0.20																											
	600	349	0.31																											
	900	431	0.53																											
	1000	456	0.60																											
	1100	490	0.68																											
	1200	519	0.76																											
Heavy Duty (HD)	1200	528	0.76																											
				With 3.3 mt Counterweight																										
General Duty (GD)	450	302	0.20																											
	600	349	0.31																											
	900	431	0.53																											
	1000	456	0.60																											
	1100	490	0.68																											
	1200	519	0.76																											
Heavy Duty (HD)	1200	528	0.76																											
				With 2.8 mt Counterweight																										
General Duty (GD)	450	302	0.20																											
	600	349	0.31																											
	900	431	0.53																											
	1000	456	0.60																											
	1100	490	0.68																											
	1200	519	0.76																											
				With 3.3 mt Counterweight																										
General Duty (GD)	450	302	0.20																											
	600	349	0.31																											
	900	431	0.53																											
	1000	456	0.60																											
	1100	490	0.68																											
	1200	519	0.76																											

The above loads are in compliance with hydraulic excavator standard EN474, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.
Capacity based on ISO 7451.
Bucket weight with Long tips.

- Maximum material density 2100 kg/m³
- Maximum material density 1800 kg/m³
- Maximum material density 1500 kg/m³
- Maximum material density 1200 kg/m³
- Not recommended

Caterpillar recommends using appropriate attachments to maximize the value customers receive from our products. Use of attachments, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of an attachment resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

M314F Wheeled Excavator Specifications

Bucket Specifications and Compatibility

Contact your Cat dealer for special bucket requirements.

Stick Length				Variable Adjustable Boom									One-Piece Boom						Offset Boom											
				2000 mm			2300 mm			2600 mm			2000 mm			2300 mm			2600 mm			2000 mm		2300 mm						
Capacity (ISO)	Width	Weight	m³	Free on wheels	Front dozer lowered	Front dozer and rear outriggers	Fully stabilized	Free on wheels	Front dozer lowered	Front dozer and rear outriggers	Fully stabilized	Free on wheels	Front dozer lowered	Front dozer and rear outriggers	Fully stabilized	Free on wheels	Front dozer lowered	Front dozer and rear outriggers	Fully stabilized	Free on wheels	Front dozer lowered	Front dozer and rear outriggers	Fully stabilized	Free on wheels	Front dozer lowered	Front dozer and rear outriggers	Fully stabilized			
				CW20/CW20s Buckets				With 2.8 mt Counterweight																						
Ditch Cleaning (DC)	1800	476	0.68																											
	2000	531	1.00																											
Ditch Cleaning Tilt (DCT)	1800	707	0.61																											
General Duty (GD)	450	300	0.20																											
	500	309	0.24																											
	600	328	0.31																											
	750	374	0.41																											
	900	423	0.53																											
	1000	452	0.60																											
	1100	482	0.68																											
Heavy Duty (HD)	500	319	0.24																											
	1200	511	0.76																											
				With 3.3 mt Counterweight																										
Ditch Cleaning (DC)	1800	476	0.68																											
	2000	531	1.00																											
Ditch Cleaning Tilt (DCT)	1800	707	0.61																											
General Duty (GD)	450	300	0.20																											
	500	309	0.24																											
	600	328	0.31																											
	750	374	0.41																											
	900	423	0.53																											
	1000	452	0.60																											
	1100	482	0.68																											
Heavy Duty (HD)	500	319	0.24																											
	1200	511	0.76																											

The above loads are in compliance with hydraulic excavator standard EN474, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451.

Bucket weight with Long tips.

- Maximum material density 2100 kg/m³
- Maximum material density 1800 kg/m³
- Maximum material density 1500 kg/m³
- Maximum material density 1200 kg/m³
- Not recommended

Caterpillar recommends using appropriate attachments to maximize the value customers receive from our products. Use of attachments, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of an attachment resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

M314F Wheeled Excavator Specifications

Attachment Offering Guide*

When choosing between various attachment models that can be installed onto the same machine configuration, consider attachment application, productivity requirements, and durability. Refer to attachment specifications for application recommendations and productivity information.

Boom Type		One-Piece Boom																							
		2.8 mt												3.3 mt											
		(1)				(2)				(3)				(1)				(2)				(3)			
Undercarriage		Stick Length																							
		2000 mm	2300 mm	2600 mm	2900 mm	2000 mm	2300 mm	2600 mm	2900 mm	2000 mm	2300 mm	2600 mm	2900 mm	2000 mm	2300 mm	2600 mm	2900 mm	2000 mm	2300 mm	2600 mm	2900 mm	2000 mm	2300 mm	2600 mm	2900 mm
Attachments																									
Hydraulic Hammer	H110Es																								
	H115Es																								
Demolition and Sorting Grapple	G310 GC																								
	G310 GC fixed CAN																								
	G310B																								
	G310B fixed CAN																								
	G313 GC																								
	G313 GC fixed CAN																								
	Scrap and Demolition Shear	S320B																							
Compactor Plate	CVP75																								
Material Handling Grapples																									
Orange Peel Grapple (5 Tines)	GSM22 – 250L & 300L	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8		
	GSM22 – 400 L	1.8	1.8	1.2	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8		
	GSM22 – 500 L	1.2	1.2	1.2	1.2	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.2	1.8	1.8	1.8	1.8	1.8	1.8	1.8		
	GSM25 – 400 L				1.2				1.8				1.8			1.2			1.8				1.8		
	GSM25 – 500L & 600L							1.8				1.8						1.8				1.8			
Clamshell Grapple (Digging)	GG525 – 580 L					1.8	1.8	1.8		1.8	1.8	1.8		1.8			1.8	1.8	1.8		1.8	1.8	1.8		
Material Density		1.2 [T/m ³] (less dense material)/1.8 [T/m ³] (standard material)																							
Pin Grabber Coupler	Cat PG	These couplers are available for the M314F (straight/linkage stick).																							
Dedicated Quick Coupler	CW-20/CW20s																								
	CWAC-40 (AutoConnect)																								
Cat Tilt-Rotator System	TRS10	Tilt-Rotator compatible with buckets, compactors, hammers, and more...																							

(1) Dozer lowered		Attachment is a match		Over the front only with Cat dedicated coupler (match Pin-on and CW)
(2) 2 sets outriggers lowered		Pin-on, Cat dedicated or Pin Grabber coupler		Over the front only with Cat Pin Grabber coupler (match Pin-on, CW and Cat PG)
(3) Dozer and outrigger lowered		Pin-on or Cat Pin Grabber coupler		Over the front only with Cat Autoconnect (match Pin-on, CW, Cat PG and CWAC)
		Pin-on or Cat dedicated coupler		Not recommended
		Pin-on only		
		Over the front only		
		Boom mount		

*Offerings not available in all areas. Matches are dependent on Wheeled Excavator configurations. Consult your Cat dealer to determine what is offered in your area and for proper attachment match.

Note: Demolition and Sorting Grapple: fixed CAN – fixed hinge plates for CW quick coupler usage.

When choosing between various attachment models that can be installed onto the same machine configuration, consider attachment application, productivity requirements, and durability. Refer to attachment specifications for application recommendations and productivity information.

M314F Wheeled Excavator Specifications

Attachment Offering Guide*

When choosing between various attachment models that can be installed onto the same machine configuration, consider attachment application, productivity requirements, and durability. Refer to attachment specifications for application recommendations and productivity information.

Boom Type		Variable Adjustable Boom																							
Counterweight		2.8 mt												3.3 mt											
Undercarriage		(1)				(2)				(3)				(1)				(2)				(3)			
Stick Length		2000 mm	2300 mm	2600 mm	2900 mm	2000 mm	2300 mm	2600 mm	2900 mm	2000 mm	2300 mm	2600 mm	2900 mm	2000 mm	2300 mm	2600 mm	2900 mm	2000 mm	2300 mm	2600 mm	2900 mm	2000 mm	2300 mm	2600 mm	2900 mm
Attachments																									
Hydraulic Hammer	H110Es	Green	Blue	Black																					
	H115Es	Orange	Orange	Orange		Orange	Green	Green							Orange	Green	Blue		Orange	Green	Green		Orange	Green	Green
Demolition and Sorting Grapple	G310 GC	Green	Blue	Black												Green									
	G310 GC fixed CAN																								
	G310B					Orange	Orange	Orange		Orange	Orange	Orange		Orange	Black			Orange	Orange	Orange		Orange	Orange	Orange	
	G310B fixed CAN																								
	G313 GC	Green	Blue	Orange												Green	Blue								
G313 GC fixed CAN																									
Scrap and Demolition Shear	S320B	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	
Compactor Plate	CVP75	Grey	Green	Blue		Grey	Grey			Grey	Grey			Grey	Grey			Grey	Grey			Grey	Grey		
Material Handling Grapples																									
Orange Peel Grapple (5 Tines)	GSM22 – 250 L	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	
	GSM22 – 300 L	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	
	GSM22 – 400 L	1.8	1.2	1.2	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.2	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	
	GSM22 – 500 L	1.2	1.2		1.2	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.2	1.2	1.2	1.2	1.8	1.8	1.8	1.8	1.8	1.8	1.8	
	GSM25 – 400 L								1.8					1.8	1.2			1.2	1.8	1.8	1.8	1.8	1.8	1.8	
	GSM25 – 500 L								1.8					1.8				1.8	1.8	1.8	1.8	1.8	1.8	1.8	
	GSM25 – 600 L								1.8					1.8				1.8	1.8	1.2	1.8	1.8	1.8	1.2	
Clamshell Grapple (Digging)	GG525 – 580 L					1.8	1.8	1.8		1.8	1.8	1.8					1.8	1.8	1.8		1.8	1.8	1.8		
Material Density		1.2 [T/m ³] (less dense material)/1.8 [T/m ³] (standard material)																							
Pin Grabber Coupler	Cat PG	These couplers are available for the M314F (straight/linkage stick).																							
Dedicated Quick Coupler	CW-20/CW20s CWAC-40 (AutoConnect)																								
Cat Tilt-Rotator System	TRS10	Tilt-Rotator compatible with buckets, compactors, hammers, and more...																							

- (1) Dozer lowered
 - (2) 2 sets outriggers lowered
 - (3) Dozer and outrigger lowered
- Attachment is a match
 - Pin-on, Cat dedicated or Pin Grabber coupler
 - Pin-on or Cat Pin Grabber coupler
 - Pin-on or Cat dedicated coupler
 - Pin-on only
 - Over the front only
 - Boom mount
 - Over the front only with Cat dedicated coupler (match Pin-on and CW)
 - Over the front only with Cat Pin Grabber coupler (match Pin-on, CW and Cat PG)
 - Over the front only with Cat Autoconnect (match Pin-on, CW, Cat PG and CWAC)
 - Not recommended

*Offerings not available in all areas. Matches are dependent on Wheeled Excavator configurations. Consult your Cat dealer to determine what is offered in your area and for proper attachment match.

Note: Demolition and Sorting Grapple: fixed CAN – fixed hinge plates for CW quick coupler usage.

When choosing between various attachment models that can be installed onto the same machine configuration, consider attachment application, productivity requirements, and durability. Refer to attachment specifications for application recommendations and productivity information.

M314F Wheeled Excavator Specifications

Lift Capacities – Variable Adjustable Boom

All values are in kg, bucket cylinder and bucket linkage installed, attachment: none, with counterweight (3300 kg), heavy lift on.

Medium Stick 2300 mm	T	Load at maximum reach (stick nose/bucket pin)			Load over front			Load over rear			Load over side			Load point height			mm			
		3000 mm			4500 mm			6000 mm			7500 mm			mm						
		Up	Down	Stabilizer	Up	Down	Stabilizer	Up	Down	Stabilizer	Up	Down	Stabilizer	Up	Down	Stabilizer				
7500 mm	Lower rear dozer up				*3950	*3950	3700										*3450	*3450	*3450	4640
	Lower rear dozer down				*3950	*3950	*3950										*3450	*3450	*3450	
	Lower f. dozer & r. stabilizer down				*3950	*3950	*3950										*3450	*3450	*3450	
	Lower 2 sets of stabilizers down				*3950	*3950	*3950										*3450	*3450	*3450	
6000 mm	Lower rear dozer up				*4550	4150	3750	*3450	2550	2300							*2900	2450	2200	6130
	Lower rear dozer down				*4550	*4550	4200	*3450	*3450	2600							*2900	*2900	2500	
	Lower f. dozer & r. stabilizer down				*4550	*4550	*4550	*3450	*3450	*3450							*2900	*2900	*2900	
	Lower 2 sets of stabilizers down				*4550	*4550	*4550	*3450	*3450	*3450							*2900	*2900	*2900	
4500 mm	Lower rear dozer up				*5150	3950	3600	3650	2500	2300							*2700	1950	1750	6980
	Lower rear dozer down				*5150	*5150	4050	3650	*4300	2550							*2700	*2700	2000	
	Lower f. dozer & r. stabilizer down				*5150	*5150	*5150	*4300	*4300	3950							*2700	*2700	*2700	
	Lower 2 sets of stabilizers down				*5150	*5150	*5150	*4300	*4300	*4300							*2700	*2700	*2700	
3000 mm	Lower rear dozer up				5500	3700	3300	3550	2400	2200							2550	1700	1550	7420
	Lower rear dozer down				5450	*5950	3750	3500	*4550	2450							2550	*2700	1750	
	Lower f. dozer & r. stabilizer down				*5950	*5950	5950	*4550	*4550	3800							*2700	*2700	*2700	
	Lower 2 sets of stabilizers down				*5950	*5950	*5950	*4550	*4550	*4550							*2700	*2700	*2700	
1500 mm	Lower rear dozer up				5200	3400	3050	3400	2300	2050	2450	1650	1500	2450	1650	1500	2450	1650	1500	7520
	Lower rear dozer down				5150	*6550	3500	3400	*4800	2350	2450	*3050	1700	2450	*2800	1650	2450	*2800	1650	
	Lower f. dozer & r. stabilizer down				*6550	*6550	5650	*4800	*4800	3700	*3050	*3050	2650	*2800	*2800	2650	*2800	*2800	2650	
	Lower 2 sets of stabilizers down				*6550	*6550	*6550	*4800	*4800	4450	*3050	*3050	*3050	*2800	*2800	*2800	*2800	*2800	*2800	
0 mm	Lower rear dozer up				5050	3250	2900	3300	2200	2000							2500	1650	1500	7320
	Lower rear dozer down				5000	*6500	3350	3300	*4700	2250							2500	*3100	1700	
	Lower f. dozer & r. stabilizer down				*6500	*6500	5500	*4700	*4700	3600							*3100	*3100	2700	
	Lower 2 sets of stabilizers down				*6500	*6500	*6500	*4700	*4700	4350							*3100	*3100	*3100	
-1500 mm	Lower rear dozer up	*6750	6050	5300	5000	3250	2900	3300	2200	1950							2800	1850	1700	6760
	Lower rear dozer down	*6750	*6750	6150	5000	*5700	3300	3300	*4100	2250							2800	*3200	1900	
	Lower f. dozer & r. stabilizer down	*6750	*6750	*6750	*5700	*5700	5450	*4100	*4100	3550							*3200	*3200	3050	
	Lower 2 sets of stabilizers down	*6750	*6750	*6750	*5700	*5700	*5700	*4100	*4100	*4100							*3200	*3200	*3200	
-3000 mm	Lower rear dozer up				*4000	3300	2950													
	Lower rear dozer down				*4000	*4000	3400													
	Lower f. dozer & r. stabilizer down				*4000	*4000	*4000													
	Lower 2 sets of stabilizers down				*4000	*4000	*4000													

*Limited by hydraulic rather than tipping load.


















Lift capacity ratings are based on ISO 10567:2007, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. The load point is the center line of the bucket pivot mounting pin on the stick. The oscillating axle must be locked. Lifting capacities are based on the machine standing on a firm uniform supporting surface and the Variable Boom Cylinder adjusted to the maximum length. For lifting capacity including bucket and/or quick coupler, the respective weight has to be subtracted from above values. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

M314F Wheeled Excavator Specifications

Lift Capacities – One-Piece Boom

All values are in kg, bucket cylinder and bucket linkage installed, attachment: none, with counterweight (3300 kg), heavy lift on.

Medium Stick 2300 mm		Undercarriage configuration	Load at maximum reach (stick nose/bucket pin)			Load over front			Load over rear			Load over side			Load point height										
			3000 mm			4500 mm			6000 mm						mm										
																									
6000 mm	Lower rear dozer up																								
	Lower rear dozer down																								
	Lower f. dozer & r. stabilizer down																								
	Lower 2 sets of stabilizers down																								
4500 mm	Lower rear dozer up																								
	Lower rear dozer down																								
	Lower f. dozer & r. stabilizer down																								
	Lower 2 sets of stabilizers down																								
3000 mm	Lower rear dozer up																								
	Lower rear dozer down																								
	Lower f. dozer & r. stabilizer down																								
	Lower 2 sets of stabilizers down																								
1500 mm	Lower rear dozer up																								
	Lower rear dozer down																								
	Lower f. dozer & r. stabilizer down																								
	Lower 2 sets of stabilizers down																								
0 mm	Lower rear dozer up																								
	Lower rear dozer down																								
	Lower f. dozer & r. stabilizer down																								
	Lower 2 sets of stabilizers down																								
-1500 mm	Lower rear dozer up																								
	Lower rear dozer down																								
	Lower f. dozer & r. stabilizer down																								
	Lower 2 sets of stabilizers down																								
-3000 mm	Lower rear dozer up																								
	Lower rear dozer down																								
	Lower f. dozer & r. stabilizer down																								
	Lower 2 sets of stabilizers down																								

*Limited by hydraulic rather than tipping load.

Lift capacity ratings are based on ISO 10567:2007, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. The load point is the center line of the bucket pivot mounting pin on the stick. The oscillating axle must be locked. Lifting capacities are based on the machine standing on a firm uniform supporting surface. For lifting capacity including bucket and/or quick coupler, the respective weight has to be subtracted from above values. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

M314F Wheeled Excavator Specifications

Lift Capacities – One-Piece Boom

All values are in kg, bucket cylinder and bucket linkage installed, attachment: none, with counterweight (3300 kg), heavy lift on.

Long Stick 2600 mm	T	Undercarriage configuration	Load at maximum reach (stick nose/bucket pin)			Load over front			Load over rear			Load over side			Load point height			mm
			3000 mm			4500 mm			6000 mm			7500 mm			mm			
			Front	Rear	Side	Front	Rear	Side	Front	Rear	Side	Front	Rear	Side	Front	Rear	Side	
6000 mm	T	Lower rear dozer up							*2750	2550	2350				*2250	*2250	2250	6140
		Lower rear dozer down							*2750	*2750	2600				*2250	*2250	*2250	
		Lower f. dozer & r. stabilizer down							*2750	*2750	*2750				*2250	*2250	*2250	
		Lower 2 sets of stabilizers down							*2750	*2750	*2750				*2250	*2250	*2250	
4500 mm	T	Lower rear dozer up							3650	2550	2300				*2150	1950	1800	6980
		Lower rear dozer down							3650	*3950	2600				*2150	*2150	2000	
		Lower f. dozer & r. stabilizer down							*3950	*3950	3950				*2150	*2150	*2150	
		Lower 2 sets of stabilizers down							*3950	*3950	*3950				*2150	*2150	*2150	
3000 mm	T	Lower rear dozer up	*8300	7050	6250	*5450	3750	3400	3550	2450	2200				*2150	1700	1550	7420
		Lower rear dozer down	*8300	*8300	7150	*5450	*5450	3850	3550	*4300	2500				*2150	*2150	1750	
		Lower f. dozer & r. stabilizer down	*8300	*8300	*8300	*5450	*5450	*5450	*4300	*4300	3850				*2150	*2150	*2150	
		Lower 2 sets of stabilizers down	*8300	*8300	*8300	*5450	*5450	*5450	*4300	*4300	*4300				*2150	*2150	*2150	
1500 mm	T	Lower rear dozer up				5250	3500	3150	3450	2300	2100	2450	1650	1500	*2250	1650	1500	7530
		Lower rear dozer down				5250	*6350	3550	3400	*4700	2350	2450	*2450	1700	*2250	*2250	1700	
		Lower f. dozer & r. stabilizer down				*6350	*6350	5700	*4700	*4700	3700	*2450	*2450	*2450	*2250	*2250	*2250	
		Lower 2 sets of stabilizers down				*6350	*6350	*6350	*4700	*4700	4500	*2450	*2450	*2450	*2250	*2250	*2250	
0 mm	T	Lower rear dozer up	*4950	*4950	*4950	5050	3300	3000	3350	2200	2000				2500	1700	1500	7320
		Lower rear dozer down	*4950	*4950	*4950	5050	*6650	3400	3300	*4800	2300				2500	*2550	1700	
		Lower f. dozer & r. stabilizer down	*4950	*4950	*4950	*6650	*6650	5500	*4800	*4800	3600				*2550	*2550	*2550	
		Lower 2 sets of stabilizers down	*4950	*4950	*4950	*6650	*6650	*6650	*4800	*4800	4350				*2550	*2550	*2550	
-1500 mm	T	Lower rear dozer up	*8200	6100	5300	5000	3250	2950	3300	2200	2000				2800	1850	1700	6770
		Lower rear dozer down	*8200	*8200	6150	5000	*6250	3350	3300	*4500	2250				2800	*3100	1900	
		Lower f. dozer & r. stabilizer down	*8200	*8200	*8200	*6250	*6250	5450	*4500	*4500	3550				*3100	*3100	3000	
		Lower 2 sets of stabilizers down	*8200	*8200	*8200	*6250	*6250	*6250	*4500	*4500	4350				*3100	*3100	*3100	
-3000 mm	T	Lower rear dozer up	*7000	6200	5400	*4950	3300	2950							*3350	2350	2150	5760
		Lower rear dozer down	*7000	*7000	6300	*4950	*4950	3400							*3350	*3350	2400	
		Lower f. dozer & r. stabilizer down	*7000	*7000	*7000	*4950	*4950	*4950							*3350	*3350	*3350	
		Lower 2 sets of stabilizers down	*7000	*7000	*7000	*4950	*4950	*4950							*3350	*3350	*3350	

*Limited by hydraulic rather than tipping load.

Lift capacity ratings are based on ISO 10567:2007, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. The load point is the center line of the bucket pivot mounting pin on the stick. The oscillating axle must be locked. Lifting capacities are based on the machine standing on a firm uniform supporting surface. For lifting capacity including bucket and/or quick coupler, the respective weight has to be subtracted from above values. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

M314F Wheeled Excavator Specifications

Lift Capacities – Offset Boom

All values are in kg, bucket cylinder and bucket linkage installed, attachment: none, with counterweight (3300 kg), heavy lift on.

Medium Stick 2300 mm	T	Undercarriage configuration	Load at maximum reach (stick nose/bucket pin)			Load over front			Load over rear			Load over side			Load point height						
			3000 mm			4500 mm			6000 mm			7500 mm			mm						
			Stick	Quick Coupler	Bucket	Stick	Quick Coupler	Bucket	Stick	Quick Coupler	Bucket	Stick	Quick Coupler	Bucket	Stick	Quick Coupler	Bucket	mm			
7500 mm	T	Lower rear dozer up				*3800	*3800	3650										*3300	*3300	*3300	4630
		Lower rear dozer down				*3800	*3800	*3800										*3300	*3300	*3300	
		Lower f. dozer & r. stabilizer down				*3800	*3800	*3800										*3300	*3300	*3300	
		Lower 2 sets of stabilizers down				*3800	*3800	*3800										*3300	*3300	*3300	
6000 mm	T	Lower rear dozer up				*4550	4100	3750	*3300	2450	2200							*2750	2350	2100	6120
		Lower rear dozer down				*4550	*4550	4200	*3300	*3300	2500							*2750	*2750	2400	
		Lower f. dozer & r. stabilizer down				*4550	*4550	*4550	*3300	*3300	*3300							*2750	*2750	*2750	
		Lower 2 sets of stabilizers down				*4550	*4550	*4550	*3300	*3300	*3300							*2750	*2750	*2750	
4500 mm	T	Lower rear dozer up				*5000	3900	3500	3550	2400	2200							*2600	1800	1600	6970
		Lower rear dozer down				*5000	*5000	3950	3550	*4100	2450							*2600	*2600	1850	
		Lower f. dozer & r. stabilizer down				*5000	*5000	*5000	*4100	*4100	3850							*2600	*2600	*2600	
		Lower 2 sets of stabilizers down				*5000	*5000	*5000	*4100	*4100	*4100							*2600	*2600	*2600	
3000 mm	T	Lower rear dozer up				5350	3500	3150	3400	2250	2050							2400	1550	1400	7410
		Lower rear dozer down				5350	*5700	3600	3400	*4350	2300							2400	*2600	1600	
		Lower f. dozer & r. stabilizer down				*5700	*5700	*5700	*4350	*4350	3700							*2600	*2600	*2600	
		Lower 2 sets of stabilizers down				*5700	*5700	*5700	*4350	*4350	*4350							*2600	*2600	*2600	
1500 mm	T	Lower rear dozer up				4950	3150	2800	3250	2100	1900	2300	1500	1300	2300	1450	1300	2300	1450	1300	7520
		Lower rear dozer down				4900	*6250	3200	3200	*4550	2150	2300	*2850	1500	2300	*2700	1500	2300	*2700	1500	
		Lower f. dozer & r. stabilizer down				*6250	*6250	5400	*4550	*4550	3500	*2850	*2850	2500	*2700	*2700	2500	*2700	*2700	2500	
		Lower 2 sets of stabilizers down				*6250	*6250	*6250	*4550	*4550	4300	*2850	*2850	*2850	*2700	*2700	*2700	*2700	*2700	*2700	
0 mm	T	Lower rear dozer up				4750	2950	2600	3100	2000	1750				2350	1500	1350	2350	1500	1350	7310
		Lower rear dozer down				4700	*6100	3050	3100	*4450	2050				2350	*3000	1550	2350	*3000	1550	
		Lower f. dozer & r. stabilizer down				*6100	*6100	5200	*4450	*4450	3400				*3000	*3000	2550	*3000	*3000	2550	
		Lower 2 sets of stabilizers down				*6100	*6100	*6100	*4450	*4450	4200				*3000	*3000	*3000	*3000	*3000	*3000	
-1500 mm	T	Lower rear dozer up				*6900	5550	4750	4700	2950	2600	3100	1950	1750				2650	1700	1500	6750
		Lower rear dozer down				*6900	*6900	5600	4700	*5300	3000	3100	*3800	2000				2650	*2950	1750	
		Lower f. dozer & r. stabilizer down				*6900	*6900	*6900	*5300	*5300	5150	*3800	*3800	3350				*2950	*2950	2900	
		Lower 2 sets of stabilizers down				*6900	*6900	*6900	*5300	*5300	*3800	*3800	*3800				*2950	*2950	*2950		
-3000 mm	T	Lower rear dozer up				*3650	3050	2700													
		Lower rear dozer down				*3650	*3650	3100													
		Lower f. dozer & r. stabilizer down				*3650	*3650	*3650													
		Lower 2 sets of stabilizers down				*3650	*3650	*3650													

*Limited by hydraulic rather than tipping load.

Lift capacity ratings are based on ISO 10567:2007, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. The load point is the center line of the bucket pivot mounting pin on the stick. The oscillating axle must be locked. Lifting capacities are based on the machine standing on a firm uniform supporting surface. For lifting capacity including bucket and/or quick coupler, the respective weight has to be subtracted from above values. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

Standard Equipment

Standard equipment may vary. Consult your Cat dealer for details.

ELECTRICAL

- Alternator, 100 A
- Lighting
 - LED light package, including all working lights (compatible with falling object guard). Working lights include cab mounted lights (two front, one rear), one on the counterweight for the rear camera and one on the right for the sideview camera.
 - Boom LED working light
 - Cab interior LED Light
 - Roading lights two front, halogen
 - Roading lights two rear, LED modules
- Main shut-off switch
- Maintenance free batteries, heavy duty
- Signal/warning horn
- Electrical refueling pump

ENGINE

- Cat C4.4 engine with ACERT Technology meets Stage IV emission standards
- Aftertreatment technologies including the Cat Clean Emission Module package (CEM)
- Automatic Engine Speed Control (AESC), including one touch low idle
- Engine Idle Shutdown (EIS)
- Power mode selector
- Altitude 3000 m capability without de-rate
- Automatic starting aid
- Fuel/water separator with water in fuel switch
- Electric fuel priming pump

HYDRAULICS

- Adjustable hydraulic sensitivity
- All Cat XT™-6 ES hoses
- Anti-drift valves for bucket, and tool control/multi-function circuits
- Auxiliary boom and stick lines
- Basic control circuits:
 - Medium pressure
 - Two-way, medium pressure circuit, for rotating or tilting of attachments
 - Tool control/multi function
 - One/two-way high pressure for hammer application or opening and closing of attachments
 - Programmable flow and pressure for up to 10 attachments – selection via monitor
 - Quick coupler circuit and lines for hydraulic quick coupler (both Cat Pin Grabber and dedicated/CW Quick Couplers), controlled by a dedicated switch).
- Boom Lowering Check Valve (BLCV), including overload warning device
- Heavy lift mode
- Load-sensing hydraulic system
- Separate swing pump
- Stick Lowering Check Device (SLCV)
- Stick regeneration circuit

(continued on next page)

Standard Equipment *(continued)*

Standard equipment may vary. Consult your Cat dealer for details.

OPERATOR STATION

- Reinforced (ROPS) cab structure compliant with 2006/42/EC and tested according to ISO 12117-2:2008
- Adjustable armrests
- Air conditioner, heater and defroster with automatic climate control
- Cigarette lighter (24 volt)
- Beverage cup/can holder
- Bolt-on Falling Object Guards (FOGS) capability
- Bottle holder
- Bottom mounted intermittent (four speeds) wiping system that covers the upper and lower windshield glass
- Cameras
 - Rear mounted wide angle camera (integrated into the counterweight)
 - Right side wide angle camera, mounted on the cooling hood
 - Both cameras are displayed side by side on a dedicated large color monitor
- Coat hook
- Cruise Control System
- Fastened seat belt warning signal
- Floor mat, washable, with storage compartment
- FM Radio with CD player, speakers and USB port
- Fully adjustable suspension seat
- Instrument panel, full graphic and color display
 - Information and warning messages in local language
 - Gauges for fuel level, engine coolant, Diesel Exhaust Fluid (DEF) and hydraulic oil temperature
 - Filters/fluids change intervals
 - Indicators for headlights, turning signal, low fuel, engine dial setting
 - Clock with 10-day backup battery
- Interior LED lighting with door switch
- Joystick pilot operated with one proportional slider.
- Laminated upper front windshield
- Left side console, tiltable, with lock out for all controls
- Literature holder in right hand side panel
- Mobile phone holder
- Parking brake
- Pin-code, engine start prevention
- Power supply, 12V-10A
- Rain protector*
- Rear window (tempered glass)/ emergency exit, with hammer
- Retractable seat belt, integrated into the seat
- Safety lever, integrated into the left console
- Skylight, laminated glass
- Sealed cab with positive filtered ventilation
- Sliding door windows
- Steering column, adjustable height and angle
- Storage area suitable for a lunch box
- Sunshade for windshield and skylight

UNDERCARRIAGE

- All wheel drive
- Automatic brake/axle lock
- Creeper speed
- Electronic swing and travel lock
- Heavy-duty axles, advanced disc brake system and travel motor, adjustable braking force
- Oscillating front axle, lockable, with remote greasing point
- Steps with box in undercarriage (left and right)
- Two-piece drive shaft with 1,000 hours greasing intervals
- Two speed hydrostatic transmission
- Spacer rings for tires

OTHER EQUIPMENT

- Auto-lube, centralized greasing (implement and swing gear)
- Automatic swing brake
- Counterweight, 2800 kg
- Engine emergency shutoff switch
- Mirrors, wide angle, frame and cab
- Product Link
- S•O•SSM sampling valves for engine oil, hydraulic oil and coolant
- Bucket Linkage for digging sticks

*Not compatible with the falling objects guards

Optional Equipment

Optional equipment may vary. Consult your Cat dealer for details.

AUXILIARY CONTROLS AND LINES

- Basic control circuits:
 - Second high pressure
 - Additional two-way, high pressure circuit, for tools requiring a second high or medium pressure function
- Grapple open/close controllable via bucket control on right joystick, can be selected in the monitor
- SmartBoom

HYDRAULICS

- Cat BIO HYDO Advanced HEES biodegradable hydraulic oil

FRONT LINKAGE

- Booms
 - One-piece boom, 4815 mm
 - VA boom (two piece), 5020 mm
 - Offset boom, 5020 mm
- Sticks
 - 2000 mm
 - 2300 mm
 - 2600 mm
 - 2900 mm Industrial Stick (without autolube)

ELECTRICAL

- Adjustable travel alarm
- Rotating beacon on cab

OPERATOR STATION

- Joystick steering
- Advanced joysticks with two proportional sliders
- Seat, adjustable high-back, with vertical and horizontal air-suspension and head rest
 - Comfort, automatic weight adjustment, mechanical lumbar support, heated
 - Deluxe seat adds automatic height and weight adjustment, pneumatic lumbar support, premium fabric, heated and ventilated
- Windshield
 - One-piece impact resistant, laminated windshield and skylight (EN356 P5A standards, 10 mm)
 - 70/30 split, openable
- Mirrors electrically adjustable and heated, frame and cab
- High pressure auxiliary pedal
- Joystick pattern, changeable
- Falling Objects Guards (top and front)

UNDERCARRIAGE

- Rear blade only (radial)
- Rear blade (radial), with trailer-ready package
- Front blade (radial)/rear outriggers
- Front outriggers/rear blade (radial)
- Front and rear outriggers
- Travel restraint, for roading with a clamshell

OTHER EQUIPMENT

- Cat Machine Security System (MSS)
- Cooling protection package for dusty applications (includes fine mesh for enhanced radiator protection and engine air precleaner)
- Counterweight, 3300 kg
- Fenders, front and rear
- Ride Control
- Tires (see pg. 22)
- Attachments (see pg. 25-28)
- Tilt-Rotator-Ready Package

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

AEHQ7896
(Europe, Israel)

© 2016 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

VisionLink is a trademark of Trimble Navigation Limited, registered in the United States and in other countries.

