

50 Hz, 1500 rpm

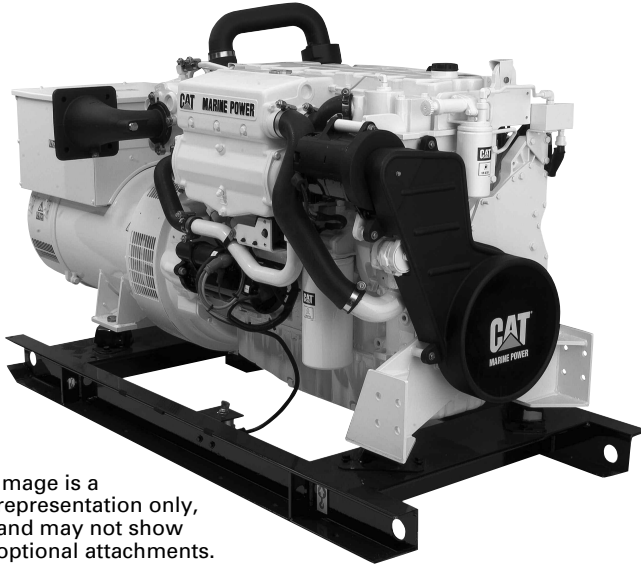


Image is a representation only, and may not show optional attachments.

CATERPILLAR® ENGINE SPECIFICATIONS

I-6, 4-Stroke-Cycle-Diesel

Emissions	IMO/EPA Tier 2 compliant
Displacement	8.8 L (538 cu. in.)
Rated Engine Speed	1500
Bore	112 mm (4.41 in.)
Stroke	149 mm (5.87 in.)
Aspiration	Turbocharged-Aftercooled
Governor	Electronic
Cooling System	Heat Exchanger and Keel-Cooled
Refill Capacity	
Cooling System	47.5 L (50.1 qt)
Lube Oil System	32 L (33.8 qt)
Oil Change Interval	500 hr
	Caterpillar Diesel Engine Oil 10W30 or 15W40
Rotation (from flywheel end)	Counterclockwise
Flywheel and flywheel housing	SAE No. 1
Flywheel Teeth	113
Max. Exhaust Backpressure	10.0 kPa (40.2 in. water)

STANDARD EQUIPMENT

Air Inlet System

Aftercooler, air cleaner, turbocharger

Control System

Electronic governor, Hydraulically actuated Electronically controlled Unit Injection (HEUI™) fuel system, Electronic Control Unit (ECU), engine-mounted 40-pin dedicated customer connector, SAE J1939 data link

Cooling System

Thermostat and housing; jacket water pump, belt-driven, centrifugal; auxiliary sea water pump, gear-driven; expansion tank (heat exchanger engines only); engine-mounted heat exchanger, removable tube bundle for sea water (heat exchanger engines only); engine oil cooler; auxiliary sea water lines; keel-cooling (includes pipe thread flange kit)

Exhaust System

Manifold and turbocharger, watercooled; 152 mm (6 in) round flanged outlet; elbow, dry

Flywheels & Flywheel Housings

Flywheel, SAE No. 1, 113 teeth; flywheel housing, SAE No. 1

Fuel System

Fuel filter, front service; fuel transfer pump; fuel priming pump

Generator

12 lead reconnectable, 3-phase brushless, separately excited from auxiliary winding to provide 300% short circuit current up to 10 seconds, 2/3 pitch, broad voltage band, IP23 water protection, solid state voltage regulator with integral voltage adjustment, Class H insulation, generator temperature rise exceeds marine society requirements for Class H insulation, 105° C @ 50° C ambient — prime, 85° C @ 50° C ambient — prime connection poles

Instrumentation

Instrument panel, electric service meter, start/stop switch, emergency stop button, maintenance due light, diagnostic light, warning light, maintenance clear switch, 15A breaker

Lube System

Crankcase breather; oil filter, RH service; oil filler, in valve cover; oil level gauge, LH service; oil pan; oil pan drain, LH; lubricating oil; engine oil pump (gear-driven)

Mounting System

Skiddable base frame, front support, anti-vibration isolators between base and engine-generator

General

Torsional vibration damper and guard; paint, Caterpillar yellow; lifting eyes; protective lifting covers; literature; variable engine wiring; battery disconnect switch; plastic wrap packaging

OPTIONAL EQUIPMENT

Exhaust System

Elbows, pipe, flexible fittings, flange, rain caps, mufflers, shields (shields required to meet MCS certification)

Fuel System

Fuel cooler, flexible fuel lines, fuel temperature sensors, fuel and oil shielding

Lube System


Manual sump pumps, oil filler, duplex oil filters

Marine Classification Society (MCS)

MCS approvable packages available direct from the factory through ABS, BV, DNV, GL, and LR

Power Take-offs

Crankshaft pulley

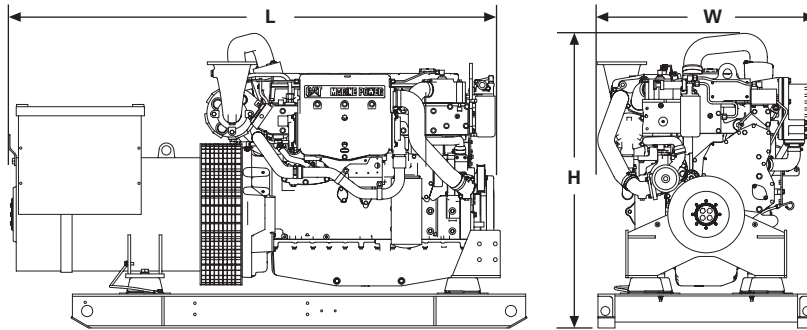

DIMENSIONS

150 ekW (188 kVA), 175 ekW (219 kVA), and 200 ekW (250 kVA) Heat Exchanger and Keel-Cooled

Length	150 ekW (188 kVA)	2106 mm (82.9 in)
	175 & 200 ekW (219 & 250 kVA)	2216 mm (87.2 in)
Width	Standard	996.8 mm (39.2 in)
	MCS	1047 mm (41.2 in)
Height	All	1169 mm (46.0 in)
Weight (wet)	150 ekW (188 kVA)	1753 kg (3865 lb)
	175 ekW (219 kVA)	1838 kg (4052 lb)
	200 ekW (250 kVA)	1903 kg (4195 lb)
Weight (wet) MCS Specification	150 ekW (188 kVA)	1762 kg (3876 lb)
	175 ekW (219 kVA)	1847 kg (4063 lb)
	200 ekW (250 kVA)	1912 kg (4206 lb)

PERFORMANCE DATA

50 Hz Ratings at 1500 rpm

% load	ekW	Lph	gph
150 ekW (0.8 pf) 188 kVA — DM7754			
100	150	41.6	10.8
75	113	31.3	8.3
175 ekW (0.8 pf) 219 kVA — DM7755			
100	175	47.1	12.4
75	131	36.2	9.6
200 ekW (0.8 pf) 250 kVA — DM7756			
100	200	53.7	14.2
75	150	40.8	10.8

RATING CONDITIONS

Power at declared engine speed is in accordance with ISO3046-1:2002E. Caterpillar maintains ISO9001:1994/QS-9000 approved engine test facilities to assure accurate calibration of test equipment. Electronically controlled engines are set at the factory at the advertised power corrected to standard ambient conditions. The published fuel consumption rates are in accordance with ISO3046-1:2002E.

Fuel rates are based on fuel oil of 35° API [16°C (60°F)] gravity having an LHV of 42 780 kJ/kg (18,390 Btu/lb) when used at 29°C (85°F) and weighing 838.9 g/L (7.001 lb/U.S. gal). Additional ratings may be available for specific customer requirements. Consult your Caterpillar representative for additional information.

Performance data is calculated in accordance with tolerances and conditions stated in this specification sheet and is only intended for purposes of comparison with other manufacturers' engines. Actual engine performance may vary according to the particular application of the engine and operating conditions beyond Caterpillar's control.

Power produced at the flywheel will be within standard tolerances up to 49°C (120°F) combustion air temperature measured at the air cleaner inlet, and fuel temperature up to 52°C (125°F) measured at the fuel filter base. Power rated in accordance with NMMA procedure as crankshaft power. Reduce crankshaft power by 3% for propeller shaft power.

CAT, CATERPILLAR, their respective logos, HEUI, "Caterpillar Yellow" and the POWER EDGE trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.