



Cat[®] CS10 GC

Smooth Drum Vibratory Soil Compactor

The Cat[®] CS10 GC features a smooth drum and is ideally suited for granular soil applications with the use of an optional padfoot shell kit for cohesive soil applications.

Superior Compaction Performance

- High weight at the drum and high amplitude deliver superior compaction performance.

Comfortable and Ergonomic Operator Station

- Simple controls are within reach.
- Outstanding visibility to the front and rear of the machine.

Proven and Exclusive Cat Features

- Includes the ultra-reliable pod-style vibratory system and sealed-for-life hitch bearing.

Reliable Cat Engine


- The Cat engine provides ample power and consistent performance.
- Standard Eco-mode reduces fuel use during normal operation.

Simple Maintenance

- Maintenance-free hitch bearings and extended maintenance intervals for vibratory system and hydraulic system provide more uptime and lower maintenance costs.

Optional Cat Compaction Control Technology

- Compaction control helps the operator determine when compaction has been completed to specification for greater productivity and uniform compaction quality.
- Scalable solutions can be configured to meet customer needs.

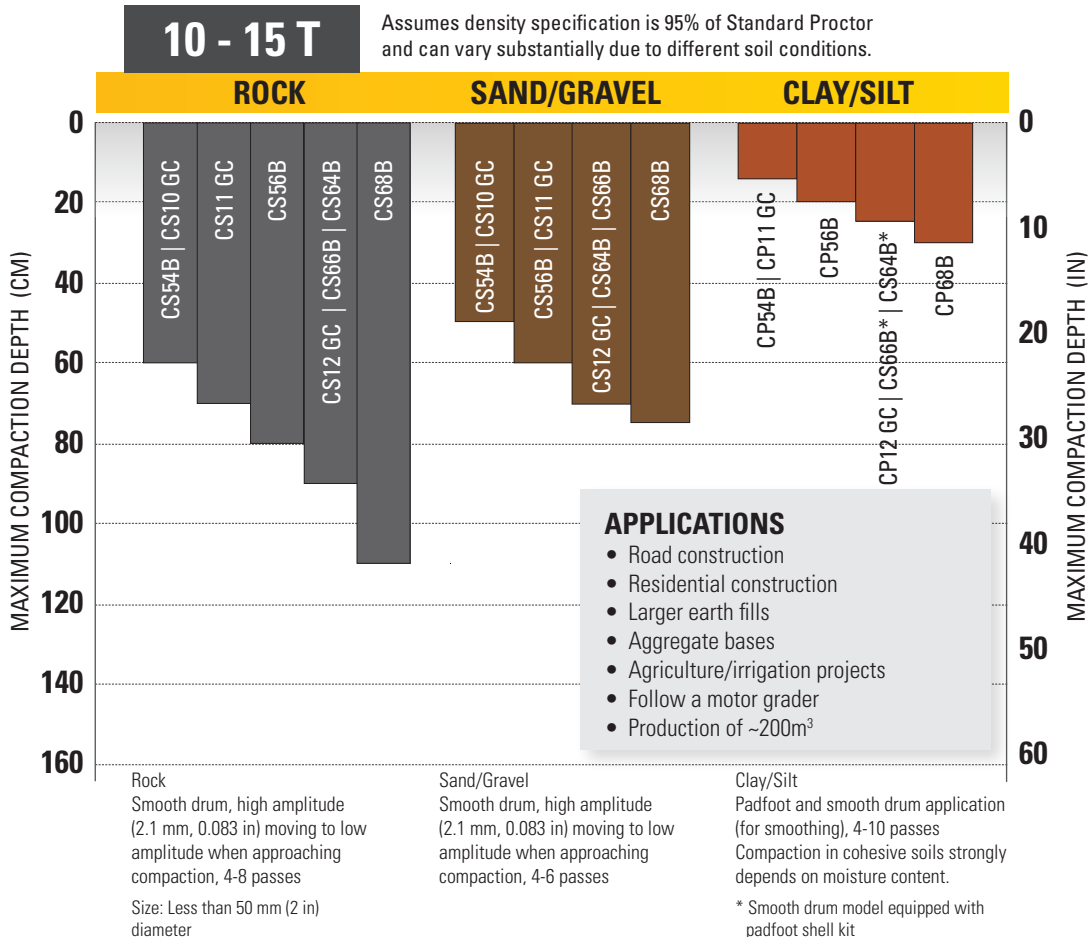

Cat® CS10 GC Smooth Drum Vibratory Soil Compactor

Technical Specifications

Engine - Power Train		
Engine Model	Cat C3.6	
Global Emissions	US EPA Tier 4 Final EU Stage V	
Gross Power ISO 14396	90.0 kW	121.0 hp
Gross Power SAE J1995	91.7 kW	122.9 hp
Net Power ISO 9249*	83.7 kW	112.2 hp
Net Power SAE J1349*	82.9 kW	111.2 hp
Displacement	3.6 L	219.7 in ³
Stroke	120 mm	4.7 in
Bore	98 mm	3.9 in
Max. Travel Speed (Forward or Reverse)	11 km/h	6.84 mph
Theoretical Gradeability, with or without vibration**	55%	

Weights		
Operating Weight w/ ROPS/FOPS canopy	10 287 kg	22,679 lb
Operating Weight w/ ROPS/FOPS cab	10 449 kg	23,036 lb
Weight at Drum w/ ROPS/FOPS canopy	5778 kg	12,738 lb
Weight at Drum w/ ROPS/FOPS cab	5824 kg	12,840 lb


* Net power advertised is the power available at the engine flywheel when equipped with a fan at maximum speed, air cleaner, clean emissions module, and alternator.

** Actual gradeability may vary based on site conditions and machine configuration. Refer to the Operation and Maintenance Manual for more information.

Vibratory System Specifications		
Nominal Amplitude - High	2.0 mm	0.079 in
Frequency at High Idle	30.0 Hz	1800 vpm
Frequency at Eco-Mode	28.6 Hz	1716 vpm
Nominal Amplitude - Low	1.0 mm	0.039 in
Frequency at High Idle	33 Hz	1980 vpm
Frequency at Eco-Mode	31.5 Hz	1890 vpm
Centrifugal Force		
Maximum	250 kN	56,200 lb
Minimum	149 kN	33,500 lb
Static Linear Load		
w/ ROPS/FOPS canopy	27.1 kg/cm	151.8 lbs/in
w/ ROPS/FOPS cab	27.3 kg/cm	152.9 lbs/in
French classification, data/class	38.6	VM2
w/ ROPS/FOPS cab		

Service Refill Capacities		
Fuel Tank, total capacity	213 L	56.3 gal
Diesel Exhaust Fuel refill capacity	19 L	5.0 gal
Cooling System	18.5 L	4.9 gal
Engine Oil w/ Filter	11.6 L	3.1 gal
Eccentric Weight Housings (combined)	26 L	6.9 gal
Axle and Final Drives	10 L	2.6 gal
Hydraulic Tank (service refill)	23 L	6.1 gal

Cat® CS10 GC Smooth Drum Vibratory Soil Compactor

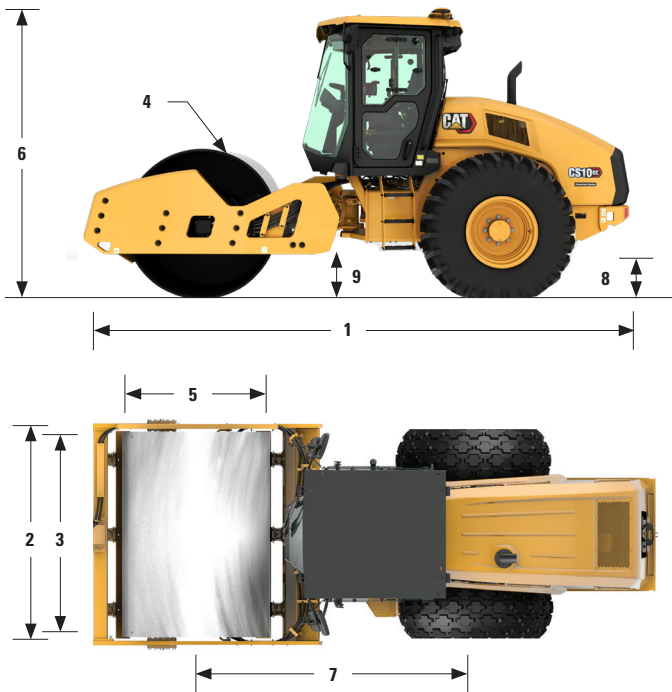

Dimensions

1	Overall Length	5.70 m	18.71 ft
2	Overall Width	2.30 m	7.53 ft
3	Drum Width	2134 mm	84 in
4	Drum Shell Thickness	25 mm	0.98 in
5	Drum Diameter	1535 mm	60.4 in
6	Overall Height	3.0 m	9.8 ft
	w/ Padfoot Shell Kit option	3.03 m	9.93 ft
7	Wheelbase	3.0 m	9.8 ft
8	Ground Clearance	518 mm	20.4 in
9	Curb Clearance	492 mm	19.4 in
	Inside Turning Radius	3.86 m	12.7 ft
	Hitch Articulation Angle	34°	
	Hitch Oscillation Angle	15°	

Optional Padfoot Shell Kit Specifications

Number of Pads	120	
Pad Height, oval pads	90 mm	3.5 in
Pad Face Area, oval pads	63.5 cm ²	9.8 in ²
Pad Height, optional square pads	90 mm	3.5 in
Pad Face Area, optional square pads	105.6 cm ²	16.4 in ²
Number of Chevrons	16	

Cat® CS10 GC Smooth Drum Vibratory Soil Compactor

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
OPERATOR ENVIRONMENT			POWER TRAIN		
ROPS/FOPS Canopy with Handrails/Guardrails, Floor Mat	✓		Cat C3.6 Diesel Engine, 4 cylinder	✓	
Vinyl Adjustable Seat, Seat Belt	✓		Single Propel Pump	✓	
Adjustable Tilting Steering Column	✓		Fuel Filter, Water Separator, Priming Pump, Water Indicator	✓	
12-volt Power Outlet	✓		Radiator/Hydraulic Oil Cooler	✓	
Horn, Backup Alarm	✓		Dual Braking System	✓	
Internal Rear View Mirror	✓		Two-speed Hydrostatic Transmission	✓	
ROPS/FOPS Cab with Climate Control		✓	Transmission Guard		✓
Deluxe High-back Air-ride seat (Cab)		✓	TECHNOLOGY SOLUTIONS		
Sun/Debris Shields (Canopy)		✓	Measure - Machine Drive Power and/or CMV		✓
Cab Internal Roll-down Sun Screen (Cab)		✓	Map - SBAS GNSS Mapping		✓
Rear View Camera with Color Touchscreen Display		✓	Connect - Cloud and Machine Connectivity		✓
Sound Reduction Kit		✓	ELECTRICAL		
VIBRATORY SYSTEM			12 volt Electrical System	✓	
Smooth Drum	✓		150 ampere Alternator	✓	
Dual Amplitude, Dual Frequency	✓		900 Cold-cranking Amps Battery Capacity	✓	
Pod-Style Eccentric Weight Housings	✓		OTHER		
Auto-vibe Function	✓		Product Link™	✓	
Rear Adjustable Steel Scraper	✓		Sight Gauges for Hydraulic Oil Level and Radiator Coolant Level	✓	
Padfoot Shell Kit (oval or square pads available)		✓	S-O-S SM Sampling Valves: Engine Oil, Hydraulic Oil and Coolant	✓	
Dual Adjustable Steel Scrapers		✓	Upgraded LED Light Package		✓
Dual Adjustable Polyurethane Scrapers		✓	Amber Rotating Beacon		✓
			Flotation Tread or Lug Tread Tires		✓

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2021 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

VisionLink is a trademark of Trimble Navigation Limited, registered in the United States and in other countries.

QEHQ2757-01 (01-2021)

