



Picture shown may not reflect actual configuration

Features

Proven Energy Yield

- 19.1% efficiency
- -0/+5W positive power tolerance

Excellent Performance in Low Irradiance

- Outstanding power output in low irradiance conditions such as dawn, dust, and cloudy days.

Anti-PID

- Anti-PID (performance induced degradation) techniques for processing solar cells and encapsulation of modules applied.

Adaptability to Harsh Environments

- Excellent anti-salt mist and anti-ammonia capability; adaptable to harsh environments such as seaside and farms.

Robust Frame

- Robust module construction enables installed module to withstand 5400 Pa front side static loading and 25mm hail impact at 23m/s.

Tests

- IEC 61215, IEC61730 Class C and UL1703 Type 1 fire rating
- ISO 9001:2008: ISO Quality Management System
- ISO 14001:2004: ISO Environment Management System
- TS62941: Guideline for module design qualification and type approval
- OHSAS 18001: 2007 Occupational Health and Safety

PVC370 MP Monocrystalline Photovoltaic Module

The monocrystalline photovoltaic modules feature high efficiency low LID mono PERC technology and provide excellent performance under low temperature or low light environment. The modules provide high power output at high levels of reliability.

Certifications (pending receipt of certificate)


- Available listing: TUV SUD, CSA, CE

Worldwide Product Support

- Cat® dealers have over 1,800 dealer branch stores operating in over 200 countries
- Your local Cat dealer provides extensive pre-sale and post-sale support, including design consultation, service contracts, and all maintenance agreement.

Module Warranty

- 10-year warranty for materials and processing
- 25-year warranty for linear power output. Produces more than 98% power in the first year, then declining by 0.55% per year, ending at 84.8% power after 25 years.

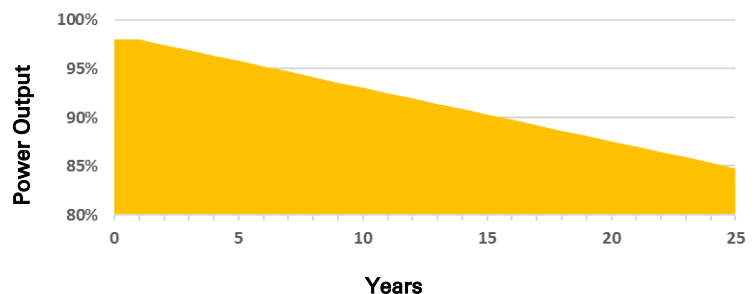

Module Rating at Standard Test Conditions (STC)

| 1000W/m ² , AM 1.5, 25°C | Model | PVC370 MP |
|-------------------------------------|----------------------|-----------|
| Nominal Power (-0/+5W) | P _{MPP} (W) | 370 |
| Voltage at P _{MAX} | V _{MPP} (V) | 39.7 |
| Current at P _{MAX} | I _{MPP} (A) | 9.32 |
| Open Circuit Voltage | V _{OC} (V) | 48.4 |
| Short Circuit Current | I _{SC} (A) | 9.93 |
| Module Efficiency | % | 19.1 |
| Maximum System Voltage | V _{SYS} (V) | 1500 |
| Maximum Series Fuse | I _{CF} (A) | 20A |

Rating at Nominal Operating Cell Temperature


| 800W/m ² , 20°C air temperature, AM 1.5, 1m/w wind speed | | |
|---|----------------------|-------|
| Nominal Power | P _{MPP} (W) | 274.1 |
| Voltage at P _{MAX} | V _{MPP} (V) | 36.7 |
| Current at P _{MAX} | I _{MPP} (A) | 7.47 |
| Open Circuit Voltage | V _{OC} (V) | 45.2 |
| Short Circuit Current | I _{SC} (A) | 8.00 |

TEMPERATURE CHARACTERISTICS

| | | |
|---|------------------------------------|------------|
| Module Operating Temperature Range | (°C) | -40 to +85 |
| Temperature Coefficient of P _{MPP} | T _k (P _{MPP}) | -0.370%/°C |
| Temperature Coefficient of V _{OC} | T _k (V _{OC}) | -0.286%/°C |
| Temperature Coefficient of I _{SC} | T _k (I _{SC}) | +0.057%/°C |

MECHANICAL DETAILS

| | |
|----------------------------|--|
| Length | 1956 mm (77 in) |
| Width | 991 mm (39 in) |
| Thickness | 40 mm (1.6 in) |
| Weight | 22.2 kg (48.9 lbs.) |
| Leadwire | 4 mm ² , 1200 mm |
| Connectors | MC4 Compatible PV-ZH202B TL-CABLE01S-F |
| Cell Type | Monocrystalline, 72 cells per panel |
| Application Class | Class II |
| Frame Material | Aluminum |
| Front Side Max Static Load | 5400 Pa |
| Rear Side Max Static Load | 2400 Pa |
| Hailstone Test | 25mm hailstone at 23 m/s |



Units: mm


Tolerance:

Length: ±2mm

Width: ±2mm

Height: ±1mm

Pitch-row: ±1mm

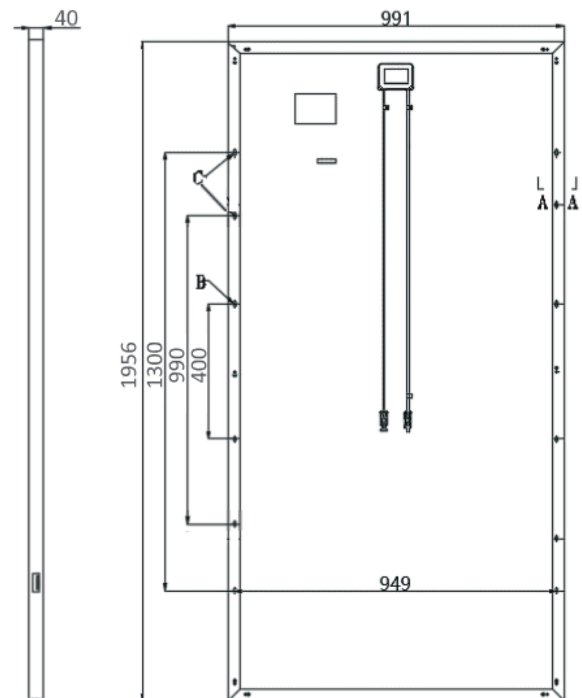

Materials and specifications are subject to change without notice.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

www.cat.com/electricpower