



Cat® 7395

ELECTRIC ROPE SHOVEL

Specifications

Dimensions

Dipper payload	63.5 tonnes	70 tons
Dipper capacity	19.1-61.2 m ³	25-80 yd ³
Length of boom	19.51 m	64 ft 0 in
Effective length of dipper handle	10.9 m	35 ft 10 in
Overall length of dipper handle	14.3 m	47 ft 0 in

Weights

Working weight, with dipper and standard links	1 288 656 kg	2,841,000 lb
Net weight, domestic, without ballast or dipper	966 832 kg	2,131,500 lb
General purpose dipper 32.1 m ³ (42 yd ³)	61 462 kg	135,500 lb
Ballast (furnished by customer)	260 362 kg	574,000 lb

- These weights will vary slightly depending upon dipper and optional equipment selection.

Main Structures

Crawler Mounting

Overall width 213.36 cm (84 in) treads, standard	9.98 m	32 ft 9 in
Overall width 274.32 cm (108 in) treads	10.44 m	34 ft 3 in
Overall length of mounting	10.41 m	34 ft 2 in
Total effective bearing area (213.36 cm/84 in treads)	32 m ²	344 ft ²
	395 kPa	57.4 psi
Total effective bearing area (274.32 cm/108 in treads)	41 m ²	442.3 ft ²
	308 kPa	44.6 psi
Number and diameter of rollers		
Upper (10)	60.96 cm	24 in
Lower (8)	139.70 cm	55 in
Take-up tumblers diameter	157.48 cm	62 in
Number and pitch of treads (74)	61.91 cm	24.375 in

Planetary Propel

- Dual motor independent drive.

Revolving Frame (Center Section)

Welded, impact-resistant steel		
Length	8.38 m	27 ft 6 in
Width	4.29 m	14 ft 1 in

Main Structures (cont'd)

Turntable

Forged rim alloy steel swing rack pitch diameter	5.18 m	17 ft
Teeth external cut (face)	24.13 cm	9.5 in
Tapered, forged alloy steel roller rails diameter	4.5 m	14 ft 9 in
Number of tapered rollers	56	
Tapered rollers diameter	20.96 cm	8.25 in

Swing

- Two planetary gearboxes, each driven by a vertically mounted motor, are mounted on either side of the revolving frame. Dual-output pinion shafts from each gearbox engage the swing rack.

Hoist

- A planetary gearbox with dual-output pinions provides the hoist torque transfer from the electric motor to the hoist drum gear.

Lube System

- Single-line system applies lubricant and grease via the PLC.
- 6 pumps (4 for lubricant and 2 for grease) located in an insulated, double-walled lube room.

Electrical

Drive

- IGBT Acutrol drive system.

Power Requirements

Voltage	3 phase, 50/60 Hz, 7,200V
Average 15-minute demand	777-1087 kW
Peak power	3106 kW

- Other voltages available to suit customer requirements.

Distribution System Requirements

Machine on separate system	3500 kVA
Machine on large system	2000 kVA

Main Electrical Systems

System voltage (nominal)	50/60 Hz, 7,200V
Trail cable (furnished by customer)	SHD-3-#1/0 at 8,000V
Transformer, auxiliary	350 kVA, 7,200V primary
Lighting transformer	25 kVA, 120/240V secondary

7395 Electric Rope Shovel

Lights

- HPS lights on boom feet, top of A-frame, machinery house, lube room, control room, utility room and flood lights.
- Incandescent lights on ground lights, walkways and operator's cab.

Front End


Boom

Boom	welded, impact-resistant steel	
Boom point sheaves	twin-grooved, flame-hardened	
Boom point sheave diameters	2.43 m	8 ft
Handle diameter	86.36 cm	34 in
Wall thickness (nominal)	7.62 cm	3 in

Front End (cont'd)

Rope Data

	No.	Diameter	Type	Construction
Hoist	2	69.8 mm (2.75 in)	twin dual	8 × 37
Crowd	1	63.5 mm (2.5 in)	single dual	8 × 37
Retract	1	63.5 mm (2.5 in)	single dual	8 × 37
Boom susp.	4	82.6 mm (3.25 in)	equalized	struct. strand
Dipper trip	1	15.9 mm (0.625 in)	single	7 × 25

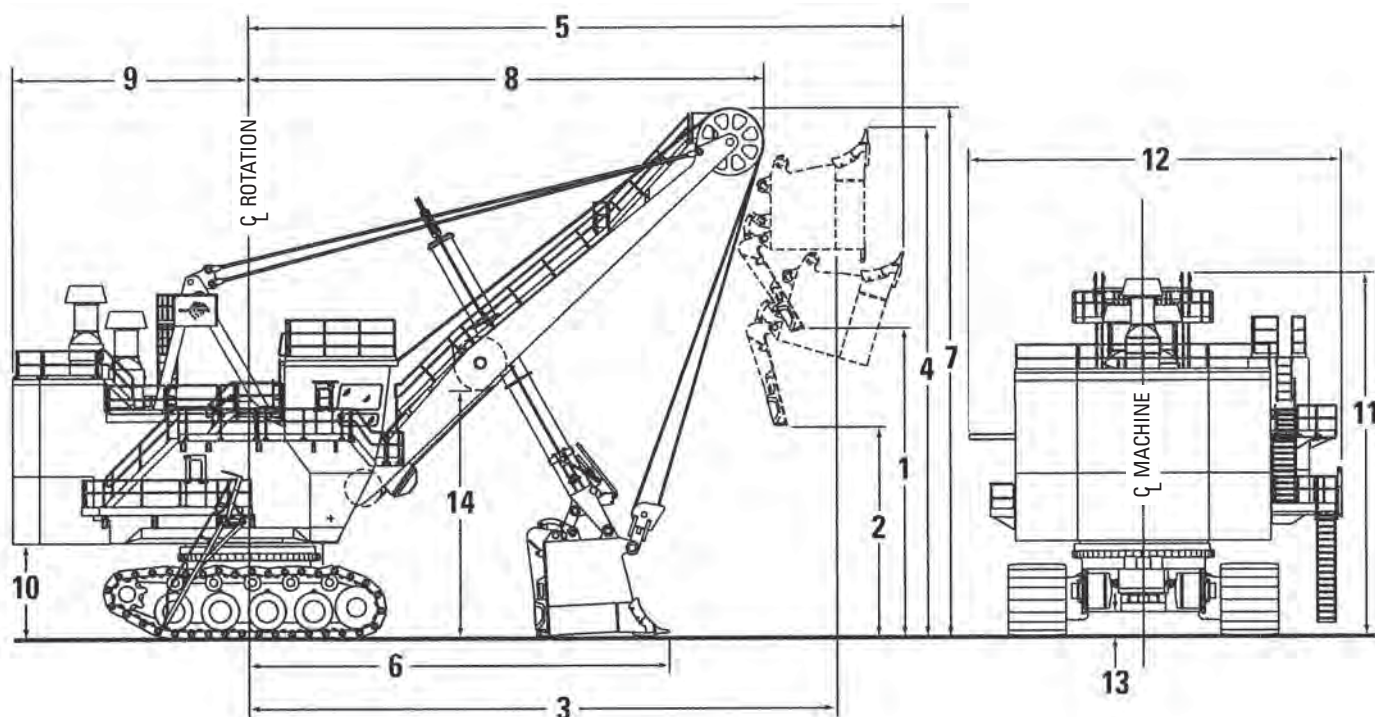

Optimal Working Ranges

1 Dumping height	10.0 m	32 ft 11 in	8 Clearance radius (boom point sheaves)	19.05 m	62 ft 6 in
2 Dumping height at maximum electric crowd limit	7.91 m	25 ft 11 in	9 Clearance radius (revolving frame)	8.67 m	28 ft 5 in
3 Dumping radius (maximum)	20.5 m	67 ft 2 in	10 Clearance under frame (to ground)	3.45 m	11 ft 4 in
4 Cutting height (maximum)	16.7 m	54 ft 11 in	11 Height of A-frame	13.3 m	43 ft 8 in
5 Cutting radius (maximum)	23.3 m	76 ft 5 in	12 Overall width	13.01 m	42 ft 8 in
6 Radius of level floor	15.4 m	50 ft 6 in	13 Clearance under lowest point in truck frame/propel gearcase	0.86 m	2 ft 10 in
7 Clearance height (boom point sheaves)	19.5 m	63 ft 11 in	14 Operator's eye level	8.64 m	28 ft 4 in

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2013 Caterpillar
All Rights Reserved
Printed in U.S.A.

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEHQ6515-01 (02-13)
Replaces AEHQ6515

